

USER MANUAL




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.



Wall Hung and Pedestal Basin

- Waste, trap and tap sold separately

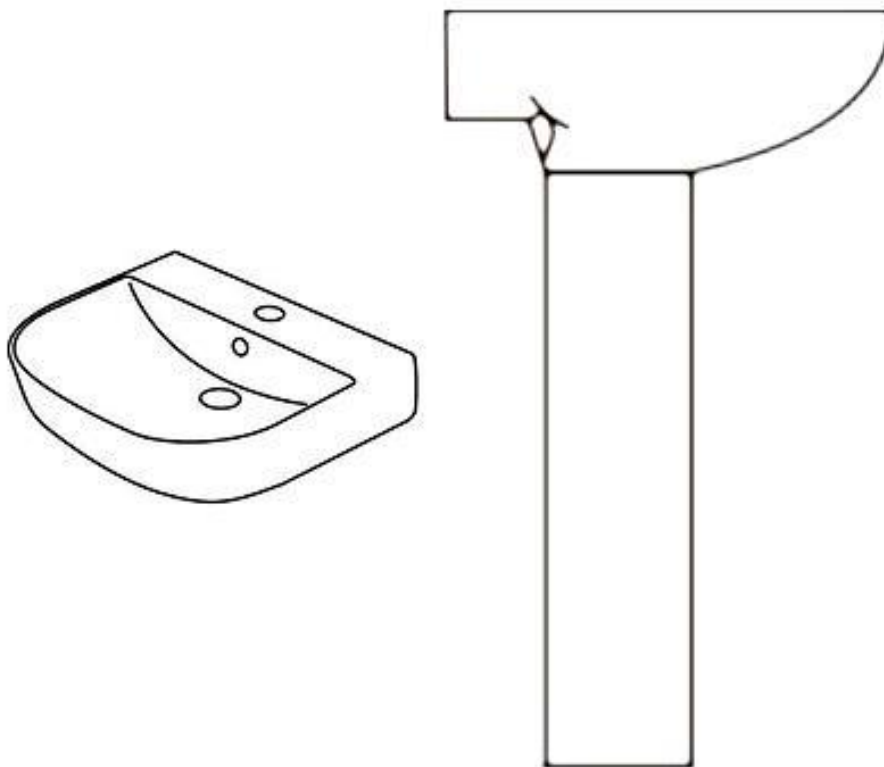

Please note: Image is for illustrative purposes only and may differ slightly to the actual product

- **Multi-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product exceeds your highest expectations. However, if you experience any problems, please:

- call our friendly UK call centre on **0871 244 0935** (9am-7pm Monday to Friday, or 10am-4pm Saturday and Sunday), or
- send us a message via **customerservices@buyitdirect.co.uk**

Important information

- Please read these instructions thoroughly and retain for future reference.
- Manufactured to BS EN14688 Sanitary appliances - wash basins.
- Please ensure that the product is checked for damage prior to installation, any damage reported after installation will not be covered.




Tools required

Drill, drill bit, spanner, hammer and silicone

Installation


IMPORTANT! Below is the suggested method of installation to a solid wall, if the wall type is different you will require a different fixing type (fixings not supplied)

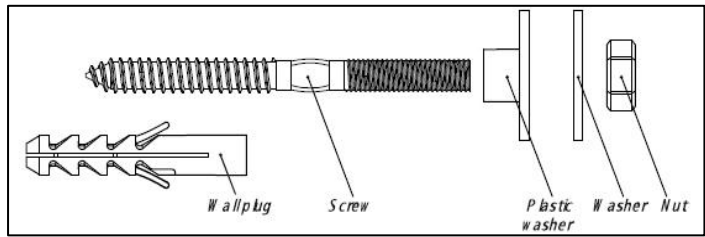

Please note: Before commencing any installation check for wires and pipes will not be damaged during drilling


Installing basin to the wall

1. Offer the basin to the wall, checking that it is level then drill the wall in the required location.




Please note: If you are drilling into a tile, it is recommended to tape the wall in the area to be drilled in order to prevent slipping


2. Insert the wall plug into the drilled hole then tap it to the finished wall surface.



3. Insert the fixing bar and tighten into the wall using a spanner or grips.




4. Hold the basin over the fixing bar then place the washers over the fixing bar as shown in the installation method diagram at the beginning.

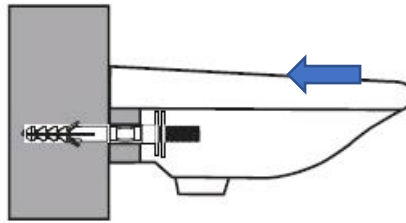


Please note: You will require two people for this section of the installation

5. Connect the nut and tighten into position using a spanner, do not overtighten.

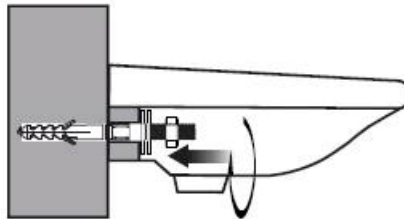

6. Check that the basin is stable then seal along the back edge.

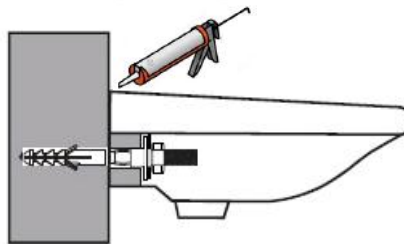


Please note: Allow all sealant to dry for at least 24 hours before use



Installing basin on a pedestal

1. Place the pedestal in the required location then place the basin onto the pedestal and align, so it is level and central. Once aligned, mark the drill holes through the holes in the back of the basin then remove and follow the instructions above from 1-3 (Installing basin to the wall)
2. Relocate the pedestal then the basin, so that the basin slots over the fixing bars then follow the instructions above from 4-6 (Installing basin to the wall).

3. Once the installation is complete, and the basin is secured, seal the basin and pedestal. Seal between the underside of the basin bowl and the top edge of the pedestal. Seal along the front bottom edge of the pedestal.

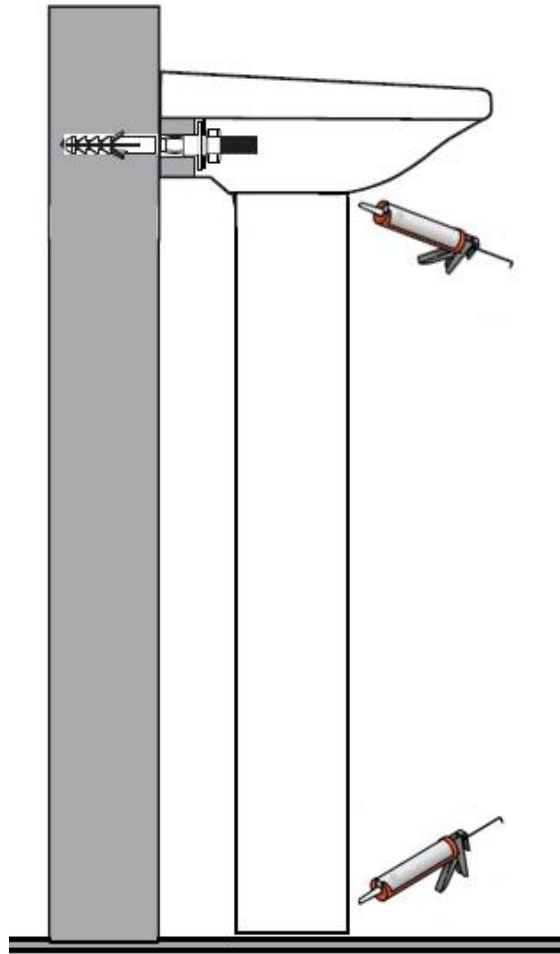

Please note: Allow all sealant to dry for at least 24 hours before use



Cleaning

To maintain the surface finish of your product, wipe clean after every use, using a clean damp cloth, a mild detergent mixture can be used. Do not use abrasive cleaning agents or materials which can strip and scratch the surface; the use of these agents or materials can invalidate your guarantee.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0871 244 0935
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

Better
bathrooms.com

Part of the BuyItDirect Group

USER MANUAL




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

Better
Bathrooms.com

Wall Hung with Semi Pedestal Basin

- Waste, trap and tap sold separately

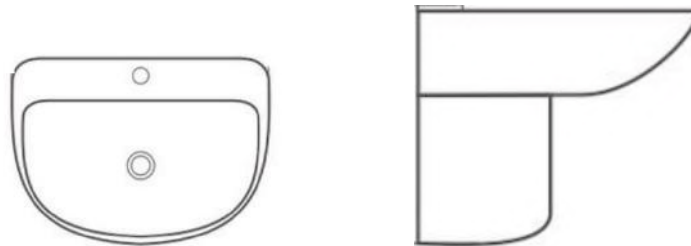

Please note: Image is for illustrative purposes only and may differ slightly to the actual product

- **Multi-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

V1_26.11.20

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product exceeds your highest expectations. However, if you experience any problems, please:

- call our friendly UK call centre on **03303903062** (9am-7pm Monday to Friday, or 10am-4pm Saturday and Sunday), or
- send us a message via **customerservices@buyitdirect.co.uk**

Important information

- Please read these instructions thoroughly and retain for future reference.
- Manufactured to BS EN14688 Sanitary appliances - wash basins.
- Please ensure that the product is checked for damage prior to installation, any damage reported after installation will not be covered.




Tools required

Drill, drill bit, spanner, hammer and silicone

Installation


IMPORTANT! Below is the suggested method of installation to a solid wall, if the wall type is different you will require a different fixing type (fixings not supplied)

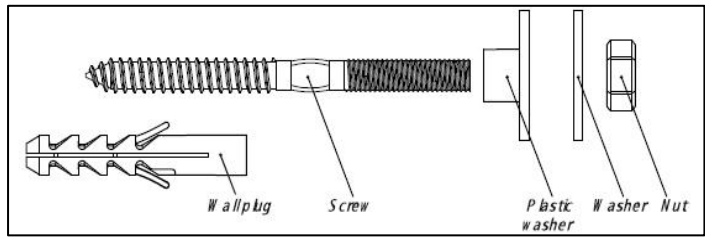

Please note: Before commencing any installation check for wires and pipes will not be damaged during drilling


Installing basin to the wall

1. Offer the basin to the wall, checking that it is level then drill the wall in the required location.




Please note: If you are drilling into a tile, it is recommended to tape the wall in the area to be drilled in order to prevent slipping


2. Insert the wall plug into the drilled hole then tap it to the finished wall surface.



3. Insert the fixing bar and tighten into the wall using a spanner or grips.




4. Hold the basin over the fixing bar then place the washers over the fixing bar as shown in the installation method diagram at the beginning.

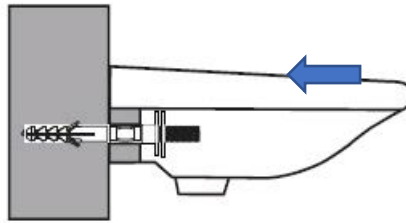


Please note: You will require two people for this section of the installation

5. Connect the nut and tighten into position using a spanner, do not overtighten.

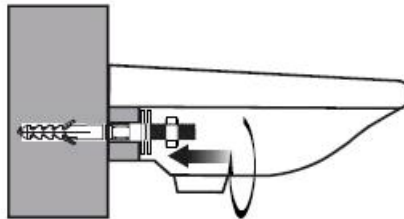



6. Check that the basin is stable then seal along the back edge.

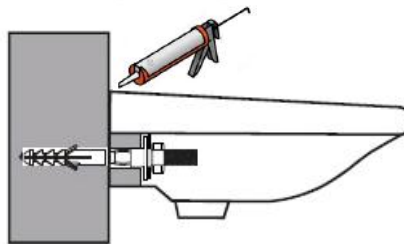


Please note: Allow all sealant to dry for at least 24 hours before use




Installing basin pedestal

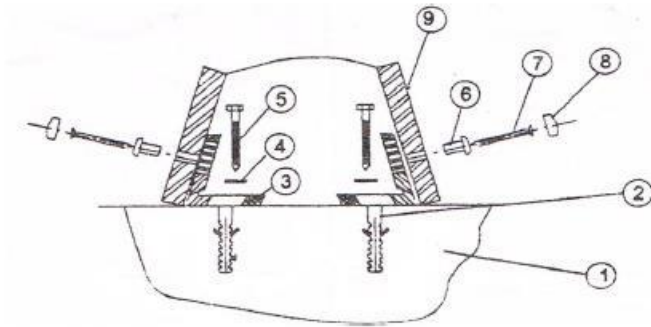


Place the pedestal against the wall in the required position ensuring this position will meet the basin.
Mark the outer edge of the pedestal




Lift the pedestal away and measure the thickness of the pedestal, mark this dimension in from the previous mark
This will give the position for the fixing bracket

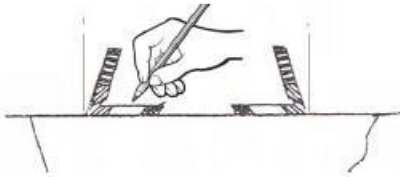

Place the brackets onto the marks and through the hole mark the screw position



Depending on your wall type you will need:
If fitting to a solid wall:
Drill holes and insert plugs (Check for pipes)
Secure brackets using screw and washer provided
If fitting to a plasterboard wall, suitable fitting will be required
Screw the brackets to the wall using a suitable fitting not supplied.

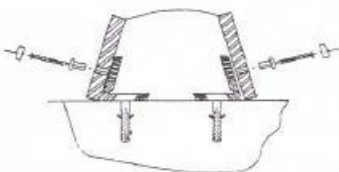

Once the brackets are secured, place the pedestal over the brackets.
Align holes in the side walls of the pedestal with the holes in the fixing bracket
Fit the screw cups into the holes on the pedestal
Fit the screw through the cup and into the brackets and tighten the screw.
Finally fit the screw cover.

Please note: Allow all sealant to dry for at least 24 hours before use



Cleaning

To maintain the surface finish of your product, wipe clean after every use, using a clean damp cloth, a mild detergent mixture can be used. Do not use abrasive cleaning agents or materials which can strip and scratch the surface; the use of these agents or materials can invalidate your guarantee.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0871 244 0935
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

Better
Bathrooms.com 

Part of the BuyItDirect Group