


# USER MANUAL



Thank you for choosing Better Bathrooms.  
Please read this manual before installing your product  
and keep for future reference.

**better**   
**bathrooms**

## Internal LED Mirror Cabinet with Cosmetic Mirror 1200x700mm Artemis

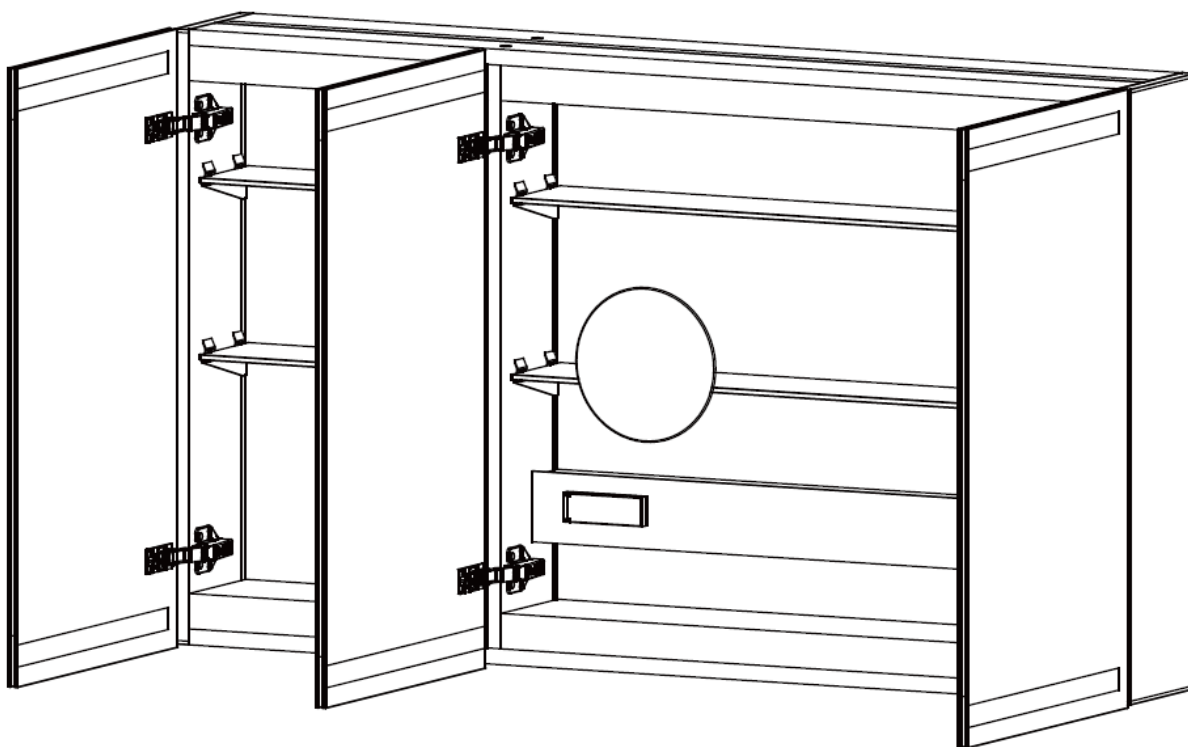

**ART1200**

- INFRARED SENSOR CONTROL
- SOFT-CLOSE DOORS
- IP44 INGRESS PROTECTION
- ALLUMINIUM ALLOY CABINET

# CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you're after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – [betterbathrooms.com/CustomerAccount/Login](https://betterbathrooms.com/CustomerAccount/Login)
- Contact us via [betterbathrooms.com/contact/contact-us](https://betterbathrooms.com/contact/contact-us)

## CONTENTS


SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLATION DIMENSIONS	6
INSTALLING THE CABINET	7
DOOR ADJUSTMENT	8
SHELF ADJUSTMENT	8
OPERATION	9
CLEANING AND MAINTENANCE	9
TECHNICAL SPECIFICATIONS	9

## SAFETY

- This cabinet should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220- 240V~ earthed supply in accordance with current IEE wiring regulations and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit, which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- The electrical connection must be an adequate distance from the rear of the cabinet to prevent the risk of shorting with the cabinet's casing.
- Before installing the fitting, ensure the mains supply is switched off and that the appropriate fuse is removed (or the appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- Ensure the cover for the shaver socket is closed when not in use to prevent moisture from entering it.
- Only connect items designed to be used with a shaver socket (such as shavers or electric toothbrushes).
- The shaver socket is not earthed and provides 230V at a maximum current of 80mA. Do not connect devices which require a higher current, a different voltage, or an earth connection.
- Any modification to the fitting will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause an electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Inspect the cabinet to ensure there are no signs of damage prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.




- Once installed, silicone can be applied between the cabinet and the wall around the unit. Don't seal the bottom of the cabinet, as this may allow water to accumulate behind it.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, his service agent or a similarly qualified person in order to avoid a hazard.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.
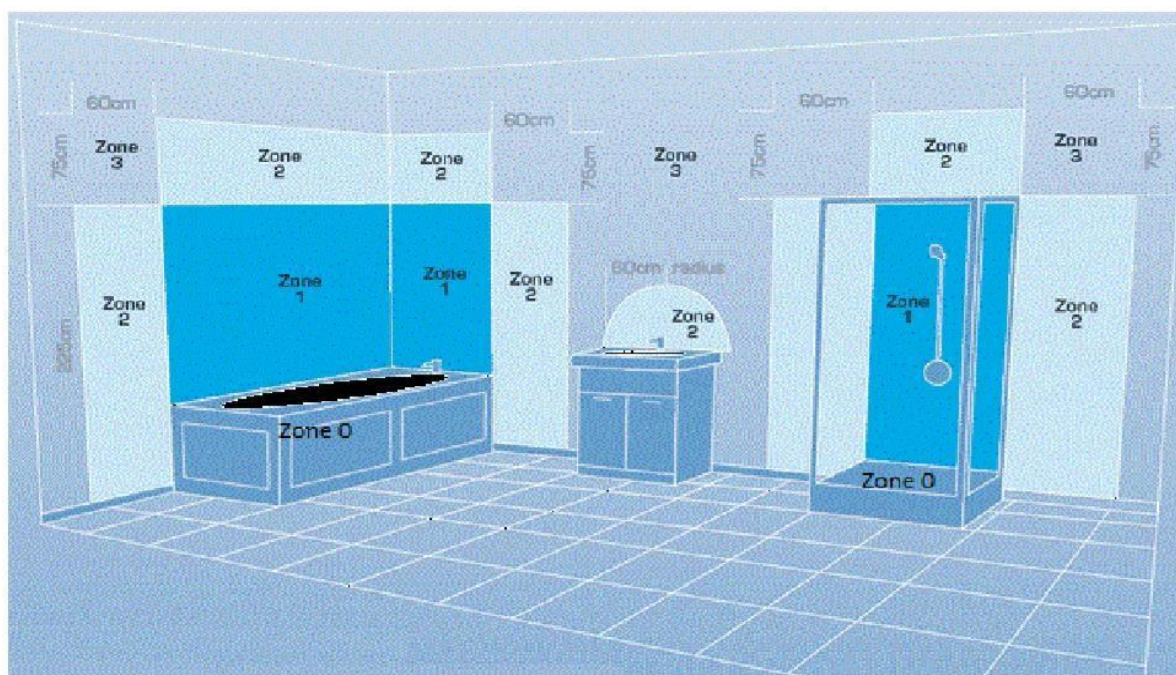
## BATHROOM ZONES




<b>Zone 0:</b>	The interior of the bathtub or shower basin.
<b>Zone 1:</b>	The area around the bathtub or shower basin up to a height of 2.25m above the floor
<b>Zone 2:</b>	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m

# PARTS SUPPLIED


		
M5 Screw (x6)	Wall Plugs (x6)	Aluminium bar (x1)

**PLEASE NOTE:** It is the installers responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure, professional advice should be sought.


# TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER




8mm DRILL BIT



PENCIL

# INSTALLATION DIMENSIONS

**NOTE:** All diagrams are for illustrational purposes. All dimensions are in mm.

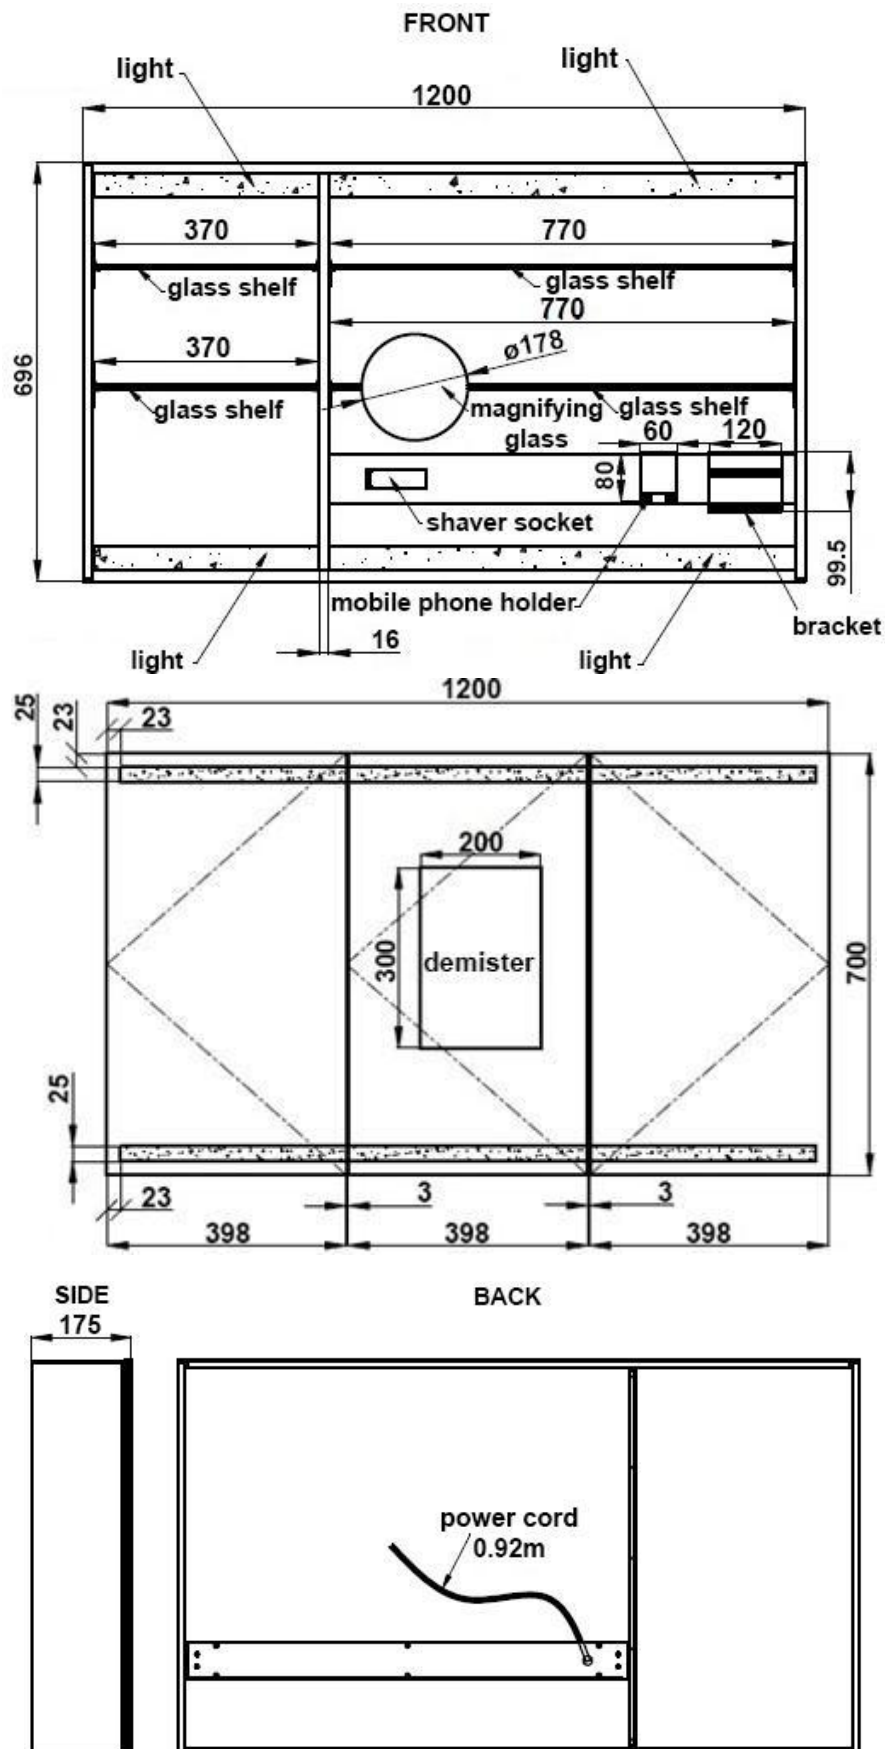


# INSTALLATION


The cabinet is designed to be wall-mounted using the included aluminium hanging bar. At the back of the cabinet, there is a corresponding slot that fits securely onto this bar.

**IMPORTANT:** Always check for pipes, wiring, or other utilities before drilling.

1. Choose the desired position of the cabinet and determine the required position of the hanging bar.
2. Hold the hanging bar in place. Use a spirit level to ensure this is level.
3. Use a pencil to mark the position of the five holes on the wall.
4. Place the hanging bar to one side and drill the holes with a suitable drill bit.
5. Insert 5 wall plugs into the holes, ensuring they are flush with the wall.
6. Place the hanging bar onto the wall, lining up the holes with the wall plugs.
7. Secure the hanging bar using 5 of the supplied screws.



8. Hang the cabinet by carefully lowering it onto the mounted hanging bar, ensuring it locks securely and cannot slide.
9. Open the cabinet door and mark the wall with a pencil through the security hole on the back panel.
10. Remove the cabinet, drill a hole at the marked position, and insert the remaining wall plug.
11. Re-hang the cabinet and ensure it aligns with the final wall plug.
12. The cabinet should be connected to a suitable fused spur in line with current regulations. We recommend placing this spur directly behind the cabinet, below the hanging bar. Ensure enough cable slack is left to allow cabinet removal.
13. Insert the final screw through the security hole and into the final wall plug to secure the cabinet.
14. Ensure the infrared sensor is unobstructed and that at least 20 cm of clearance is maintained around it for correct operation.

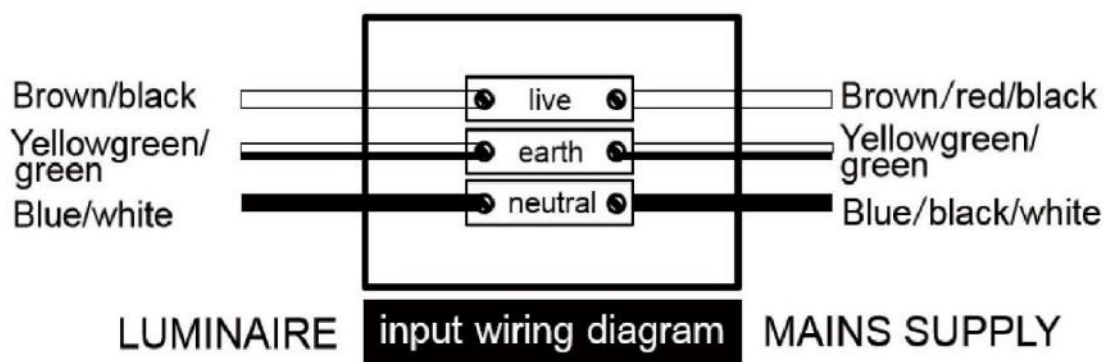






## DOOR ADJUSTMENT

If the door is not level, you can adjust it using the hinge screw.

Turning the screw clockwise will push the door right, and turning anticlockwise will pull it right.

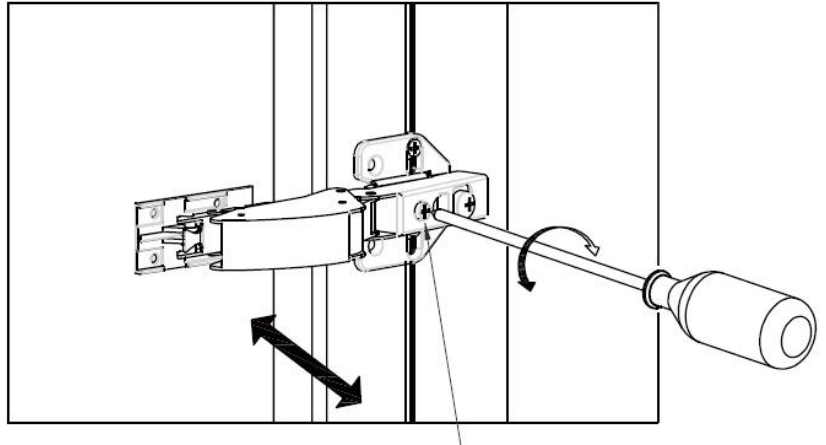

## SHELF ADJUSTMENT

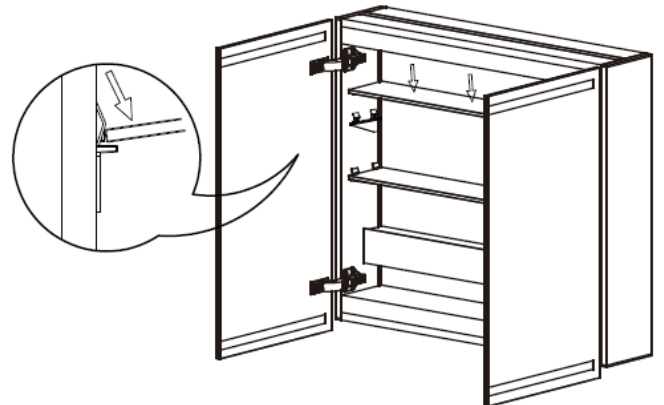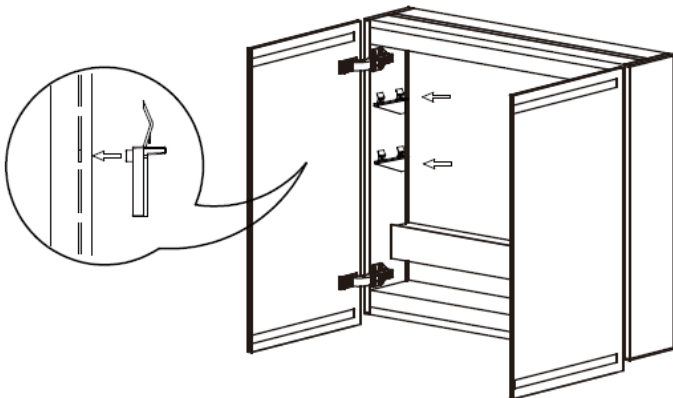

Multiple holes on both sides of the cabinets allow you to change the height of your shelves.

To adjust the shelf position:

1. Remove the shelves and their holders.
2. Insert the holders into your desired position
3. Slide the shelves in place.




## OPERATION

Your mirror has an infrared sensor on the bottom's right side. To activate the light and demister pad, move your hand across the sensor once at a distance of around 5cm.

To turn it off, move your hand across the sensor again.

Hold your hand in front of the sensor to change the colour temperature of the light.



## CLEANING AND MAINTENANCE


Never use products containing bleach or abrasive cleaners, as this will harm the product's appearance and lifespan.

Use a clean microfibre cloth to clean the mirror.

## TECHNICAL SPECIFICATION

Model	ART1200
WxHxD (mm)	1200x700x175
Net Weight (Kg)	46.3
Power Cord length (cm)	92
Rated Power (W)	66W
IP Rating	IP44
Input	220-240V~ 50 Hz

This product contains a light source of energy efficiency class E and must only be replaced by a professional or a similarly qualified person.

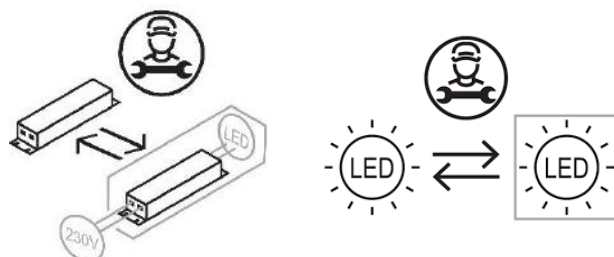

## DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.

### ***For more information***

- visit [betterbathrooms.com](http://betterbathrooms.com)
- email [support@betterbathrooms.co.uk](mailto:support@betterbathrooms.co.uk)
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better  
bathrooms**

Part of the BuyltDirect Group