

# USER MANUAL



Thank you for choosing Better Bathrooms.  
Please read this manual before installing your product  
and keep for future reference.

**better  
bathrooms**

**Product name**

**Product code BeBa\_28290**



- **Single-person assembly**
- **Tools required**
- **We always recommend using professional tradespeople to install your product**

V1\_15.09.21

# Congratulations on your purchase

*And welcome to our growing gang of savvy shoppers*

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – [betterbathrooms.com/CustomerAccount/Login](https://betterbathrooms.com/CustomerAccount/Login)
- contact us via [betterbathrooms.com/content/contact-us](https://betterbathrooms.com/content/contact-us)

## Important information


- Please read these instructions thoroughly and retain for future reference
- Pressures should meet minimum stated on the website
- Pressures must be balanced for optimum performance
- Always check for pipes and cables before drilling

# Contents


- Component Listing
- Technical Drawing
- Tools Required
- Installation Notices
- Installation Steps
- Product Operations
- Maintenance & Cleaning

# Component Listing


NO.	ITEM	QUANTITY
1	Valve Body	1
2	Riser Rail	1
3	Shower Head and Washer	1
4	Shower Handset	1
5	Shower Hose and Washers	1
6	Instruction	1
7	Wall Bracket and Fixing Kits	1
8	Cover Plate,Union and Washers	1




7




8

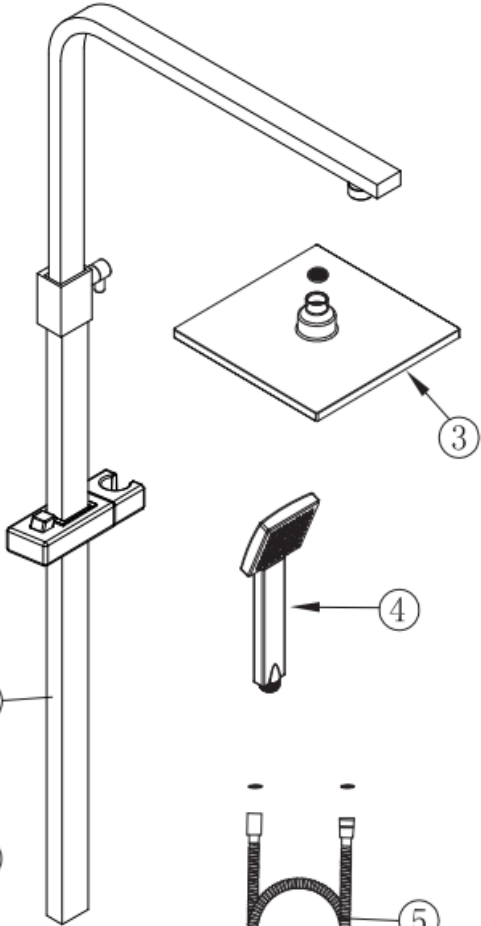


3




4



5




6



1

2

# Technical Drawing

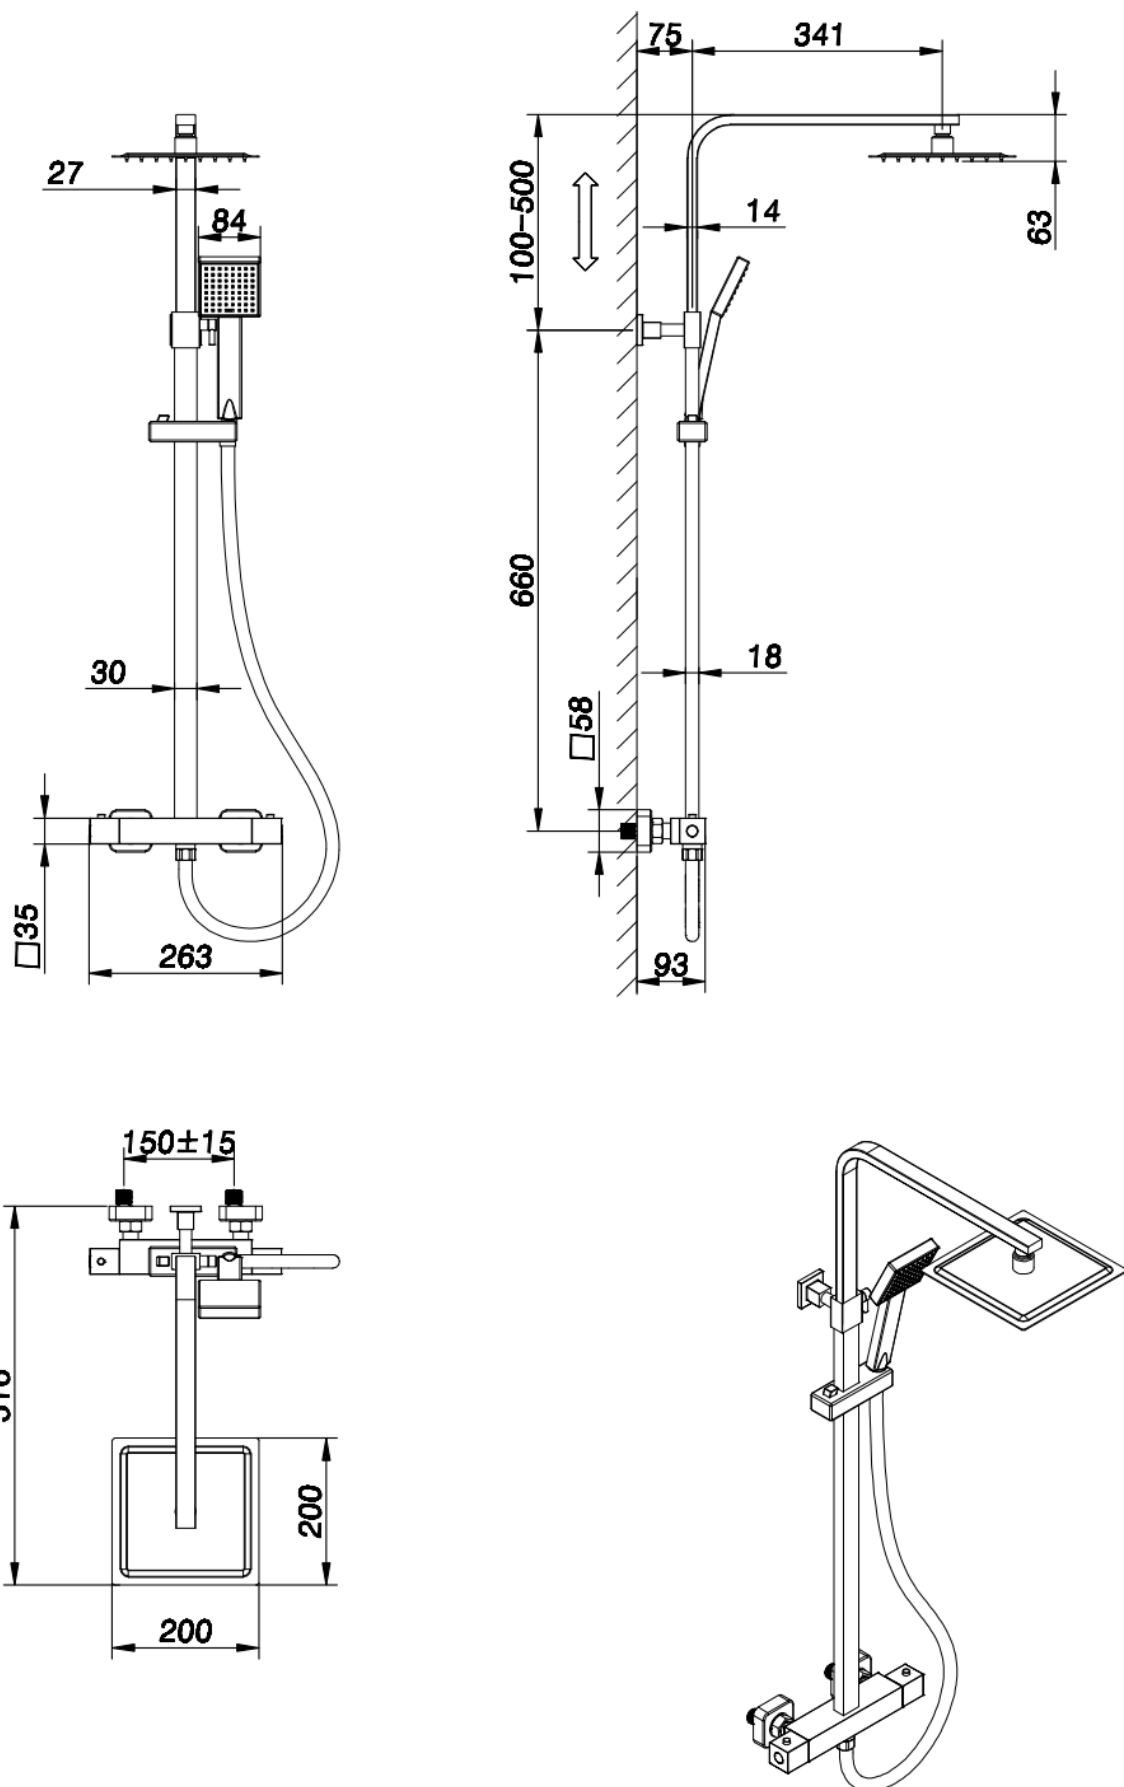






# Tools required

## Safety Notice:

Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes. Always wear protective equipment such as safety glasses and hearing protection whilst using power tools.

## Tools for installation (not supplied)

		
Electric drill	PTFE Tape	Spirit Level
		
Wrench	Screw driver	


# Installation

## Installation Notices

1. All parts should be removed from their packaging and inspected for any physical damage and make sure it is complete prior to installation; you should read these instructions thoroughly before commencing installation. We do not accept responsibility for problems that may occur due to improper installation. Always ensure you have sufficient hot and cold water pressure available to allow correct function before specifying or installing this product. Any defect prior to installation please contact with your supplier.
2. Prior to installation it is essential that you thoroughly flush through the supply pipes in order to remove any remaining solder, swarf or impurities from your system. Failure to carry out this simple procedure could cause problems or damage to the working of the product.
3. The valve has been thoroughly tested by the factory, please do not disassemble it yourself to avoid affecting the performance.
4. The hot and cold water inlets must be connected to left hot (red) and right cold (blue) to ensure proper operation of the valve.
5. Water pressure range:0.05-0.5MPA  
Water supply temperature range: Hot water (55-85°C); Cold water (4-29°C)
6. It is not advisable to use water devices with switching function, such as showers with water shut-off function.


# Installation Steps

1

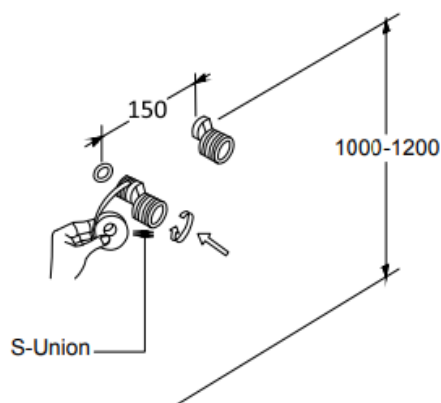


Apply PTFE tape to threads of S-union;  
Connect S-union onto inlet pipes.

2

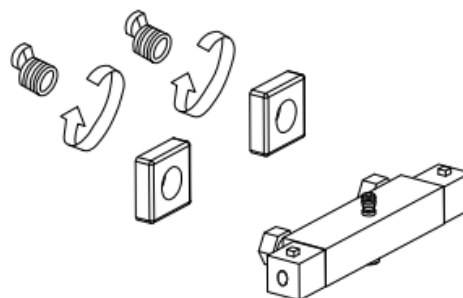


Fit the cover plates over the S-unions, then insert sealing washer into nut and tighten onto S-union with wrench, being careful not to damage the chromed finish on the connecting nuts.

3

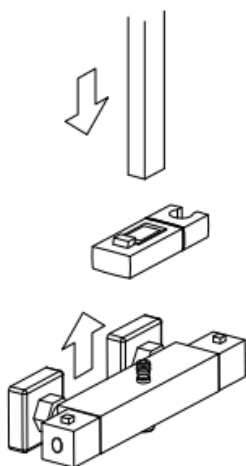


Install the riser into the top outlet of the shower valve.

4

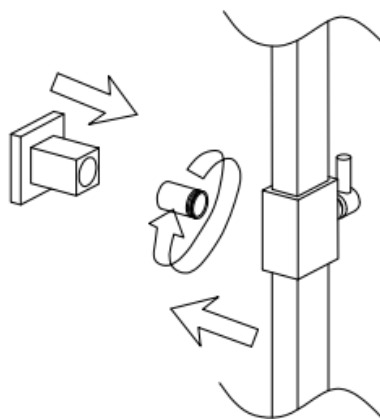


Fit the wall bracket to the riser kit.

5

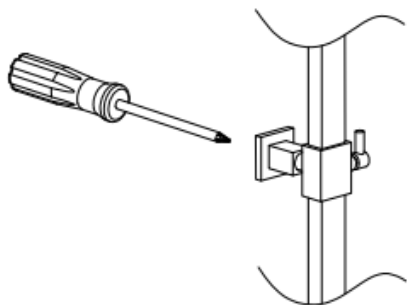



Make sure the riser is level, mark the position of the screw holes on the wall bracket.

6

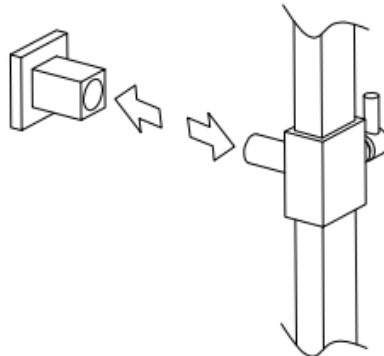


Remove the riser.

7




Drill the screw holes and install the wall plugs. To create a seal, apply a small amount of silicone on the inside of the wall plug.

8

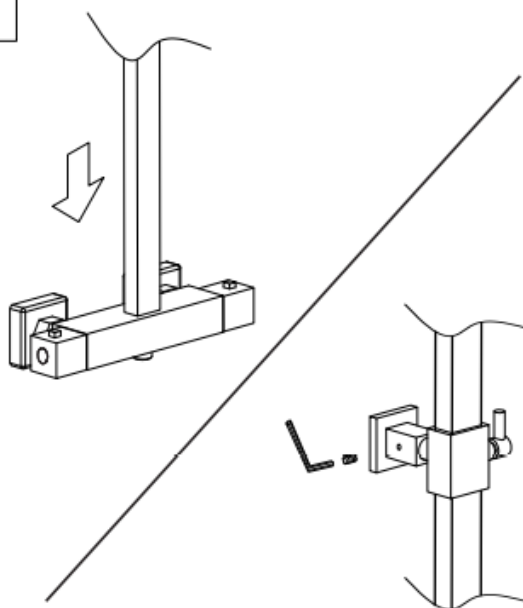


Install the riser on the wall bracket, tighten the screw.

9

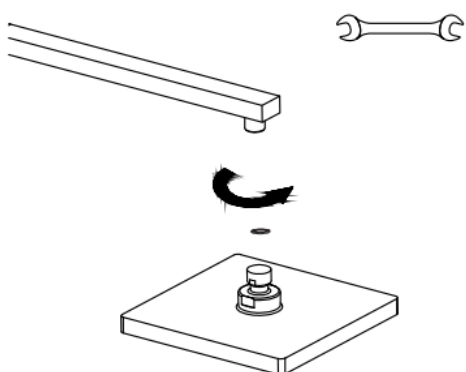

Install the shower head. Make sure the washer is fitted between the shower arm and the shower head

10

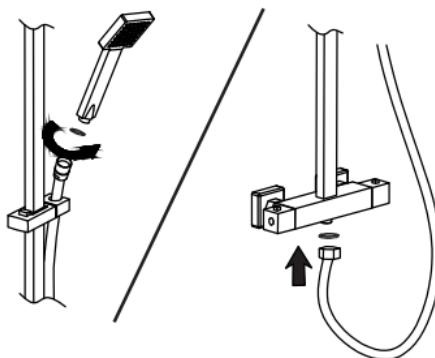


Connect the shower handset to the bottom outlet on the shower valve and screw the conical end to the shower handset. Place the conical end of the shower hose into the handset holder on the riser rail. Make sure the washers are fitted between the shower hose, valve and handset.



# Product Operation

1. Turning the right handle controls the water temperature. To prevent scalding, a safety feature of the shower includes a temperature stop at 38 degrees. To override this function the button on the handle will need to be pressed. If overriding the temperature when finished, please return the handle to below 38 degrees as to ensure the next person using the shower does not risk being exposed to high-temperature water.
2. Turning the left handle of the shower, controls the flow rate and turning the handle anticlockwise will increase the flow to the main shower head. Turning the handle clockwise will increase the water flow rate to the shower handset.

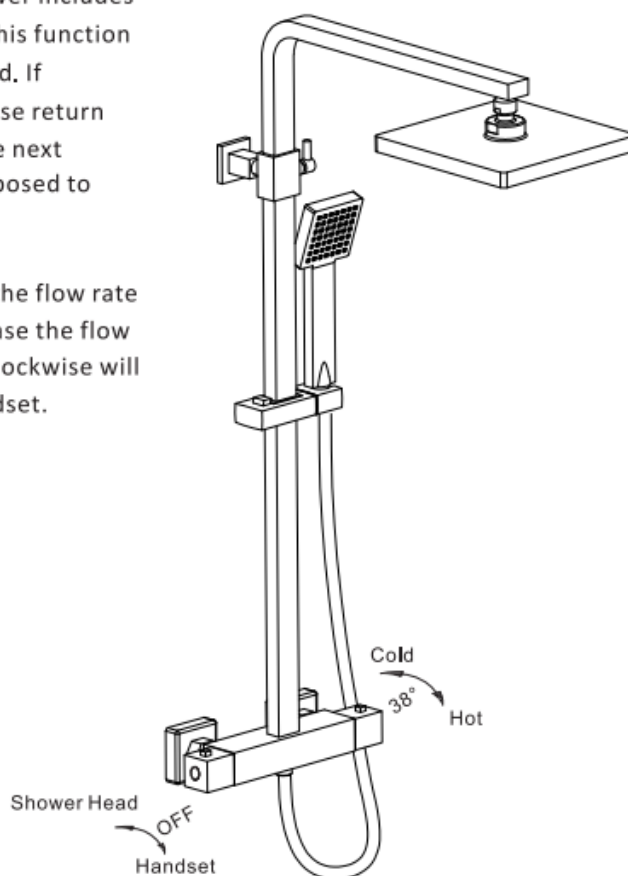

## Maintenance & Cleaning

### Product Maintenance

- Whilst modern plating techniques are used during the manufacturing of this product, if not correctly cleaned and cared for, the life span of the product will be reduced.
- It is recommended that your product be cleaned with a soft damp cloth only
- Use of chemicals/scourers will damage the plated surface.
- If the water volume reduced, remove the filter and gasket at the water connection to clean the filter and pipework.

#### ***For more information***

- visit [betterbathrooms.com](http://betterbathrooms.com)
- email [customerservices@buyitdirect.co.uk](mailto:customerservices@buyitdirect.co.uk)
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better  
bathrooms**

Part of the BuyItDirect Group