


USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

**better
bathrooms**

Outdoor Shower Matt Black with Wood Effect Base BeBa_28529

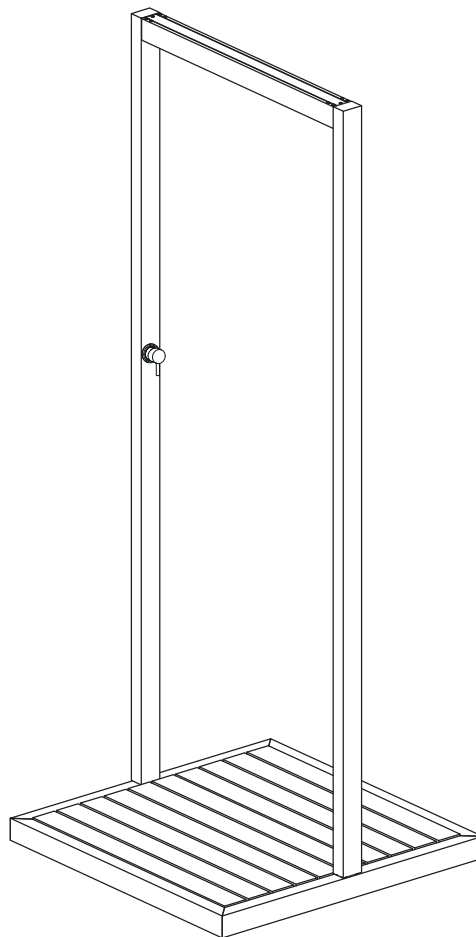

Please note: Image is for illustrative purposes only and may differ slightly to the actual product

- **Multi person assembly**
- **Tools required**
- **We always recommend using professional**
- **tradespeople to install your product**

V2_02.10.25

Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login
- contact us via betterbathrooms.com/content/contact-us

Important information

Please read these instructions thoroughly and retain for future reference

Minimum Working Pressure 1 bar

Maximum Working Pressure 3 bar

Pressure MUST be balanced

Hot supply MUST be connected to the left-hand inlet of the mixer

All installation work must be carried out to comply with:

The Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws

The system must be thoroughly flushed prior to installation


Product must be checked for damage prior to installation

Always check the installation area before drilling for pipes and cables

Contents

• Parts/ Diagrams-----	4
• Tools required-----	5
• Installation-----	5
• Using-----	9
• Troubleshooting-----	10
• Cleaning-----	10

Parts / Diagrams

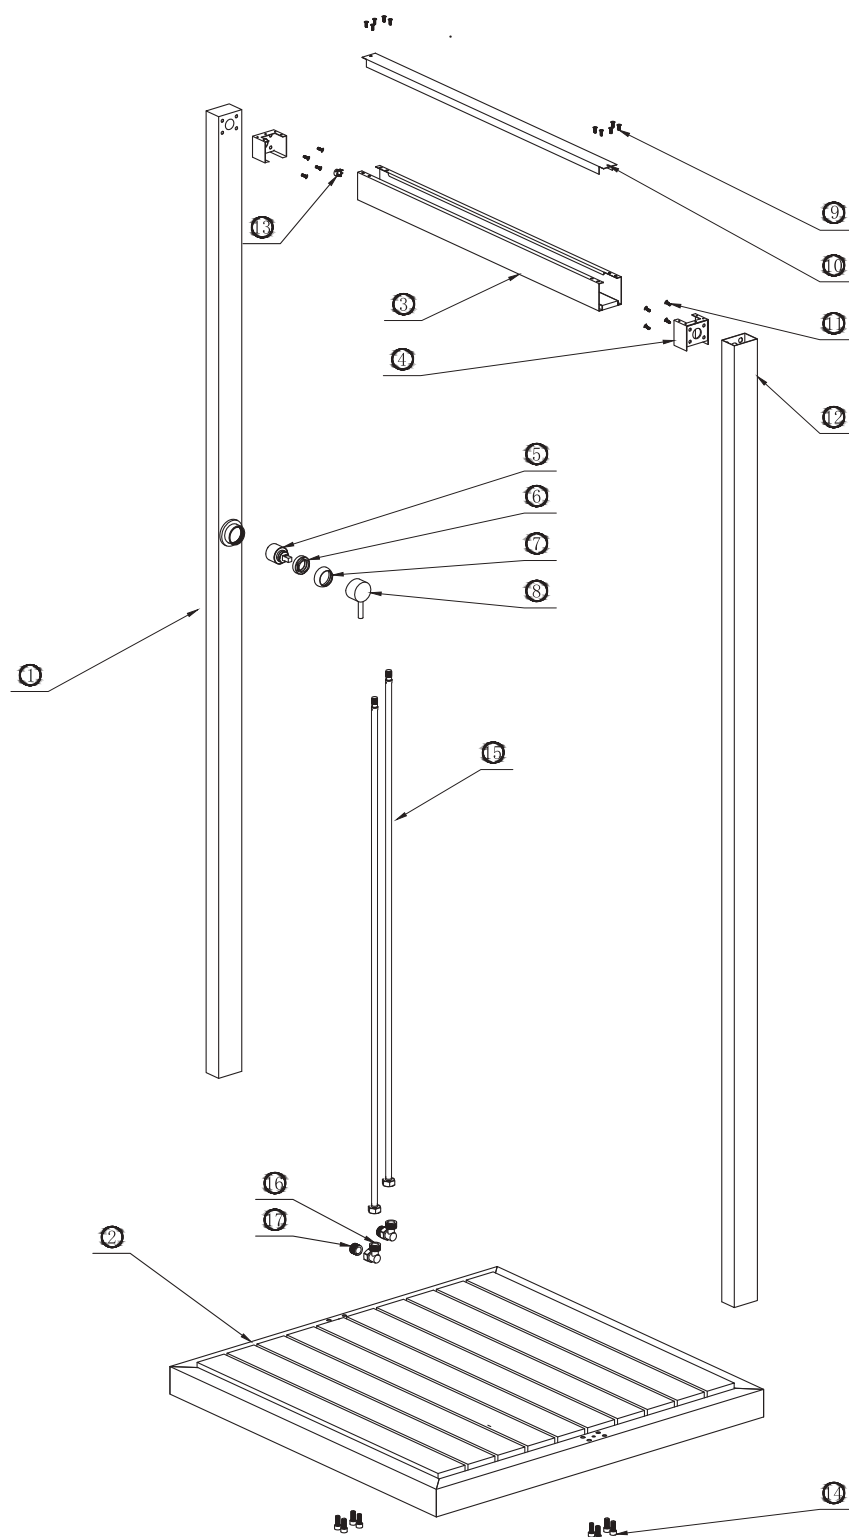

1. Left side frame
2. Base
3. Shower head
4. Connector x 2
5. Mechanical cartridge
6. Nut
7. Cover
8. Handle
9. Screw of overhead shower x 10
10. Top cover of overhead shower
11. Connector screw x 8
12. Right side frame
13. Clamp
14. Base screw x 8
15. Water-in hose x 2
16. Hose connector x 2
17. G1/2 adapter x 2

Please note that Parts are for illustrative purposes only and may differ slightly to the actual product

Tools required

Spanner

Silicone

Drill and drill bit

Spirit Level

Pencil

Tape Measure

Hammer


Screwdriver

Hex wrench 6mm


Installation

Prepare the water supply pipes to feed the shower with hot on the left and cold on the right.

Use the screwdriver to unscrew the screws at the top of overhead shower and take out the top cover.

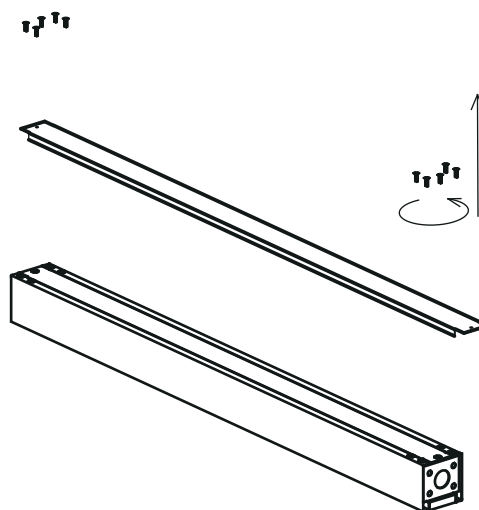


Take out the connectors at both ends.


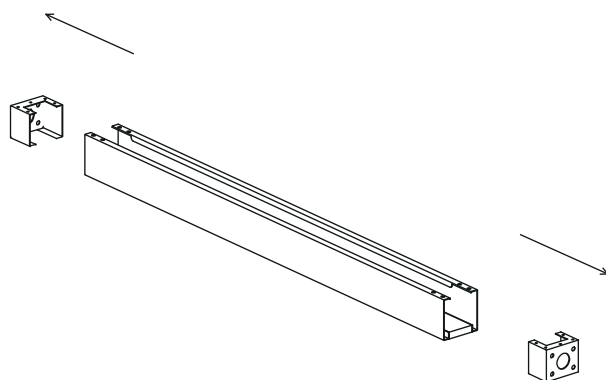


Fix one connector onto the left side frame and tighten with 4pcs screws.


Fix another connector onto the right side frame and tighten with 4pcs screws.

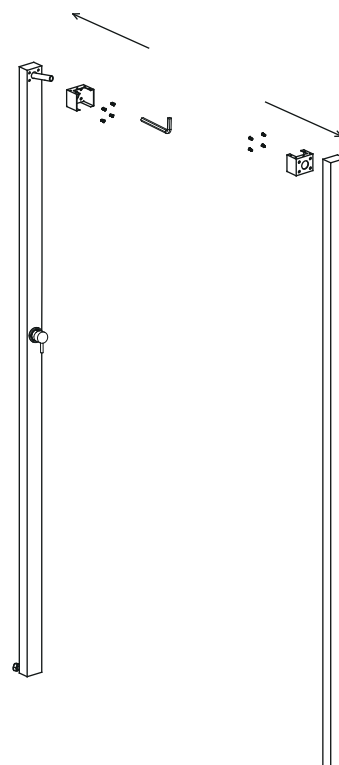


Install the overhead shower and tighten with 4pcs screws at each end.

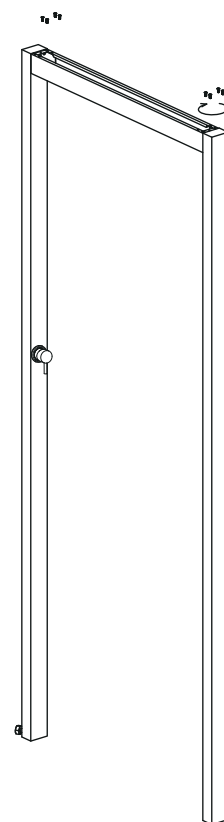


Pull out the pipe from left side frame, get 1pc clamp and fix the pipe to the connector on shower head by screwdriver.

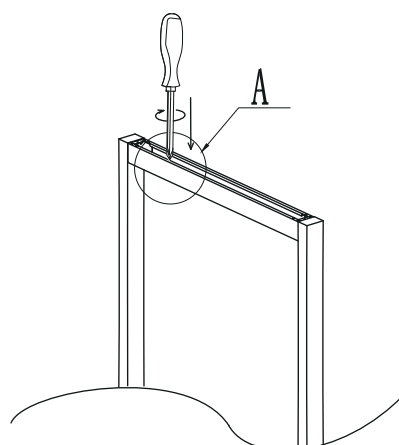

Fix the top cover onto overhead shower, put 1pc screw at each end and tighten by screwdriver.

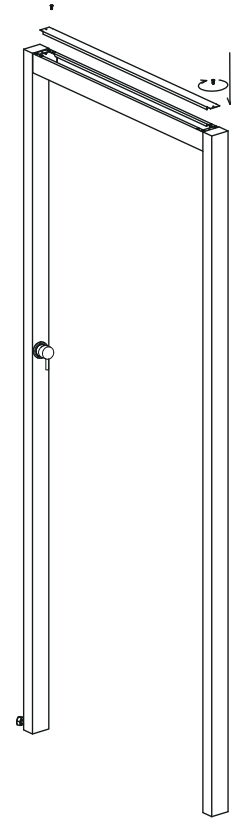


Put the frame onto the base, then tighten with 4 screws at each side.

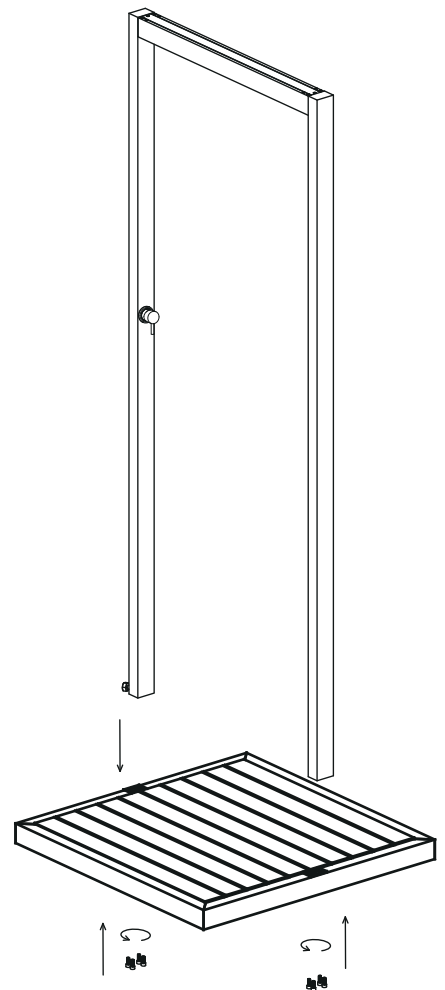

Connect the water supply pipe to the adapter and tighten with spanner.

Installation is then complete. Turn on the water supply and check for leaks.

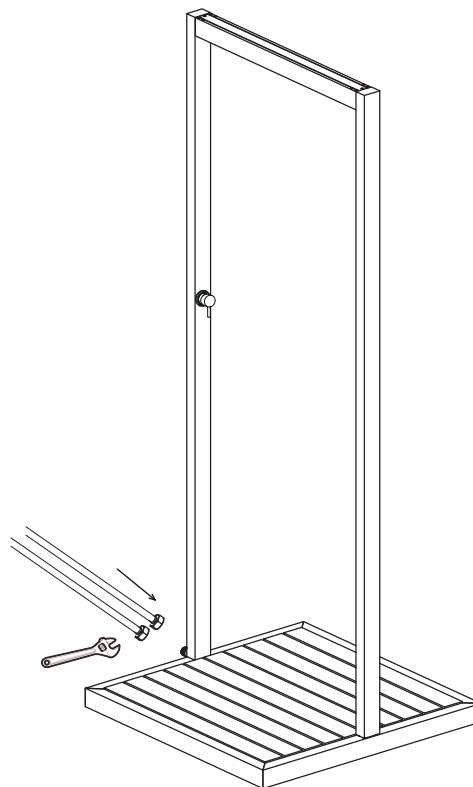


Using

To control the temperature, turn the temperature control handle until the desired temperature is reached.

As part of the installation, isolation valves must be fitted to the supply and pipes insulated against frost.

During cold periods of weather, to prevent the cartridge freezing and cracking, turn the shower on and close the isolation valves allowing the mixer to drain down fully.

Remove the cartridge, this will prevent water freezing inside the mixer/cartridge causing expansion, leading to the cartridge cracking and in turn leaking.

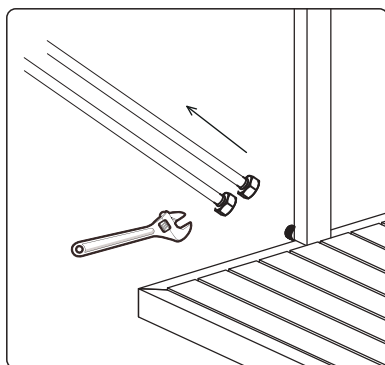

Troubleshooting

Water dripping after being turned off

1. Does the water stop dripping after a period of time, if so this is normal as the water within the unit needs to drain away, so some dripping may occur.
2. Does the dripping continue, if so the flow control valve for the function that is dripping, will need to be replaced.

Cleaning

To maintain the surface of your product, wipe with a clean damp cloth and wipe dry, do not use any abrasive cleaning agents or materials .

It is recommended to wipe and dry on a regular basis.

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group