# USERMANUAL




Thank you for choosing Better Bathrooms.

Please read this manual before installing your product and keep for future reference.



### Semi Recessed Inset Basin

Waste, trap and tap sold separately

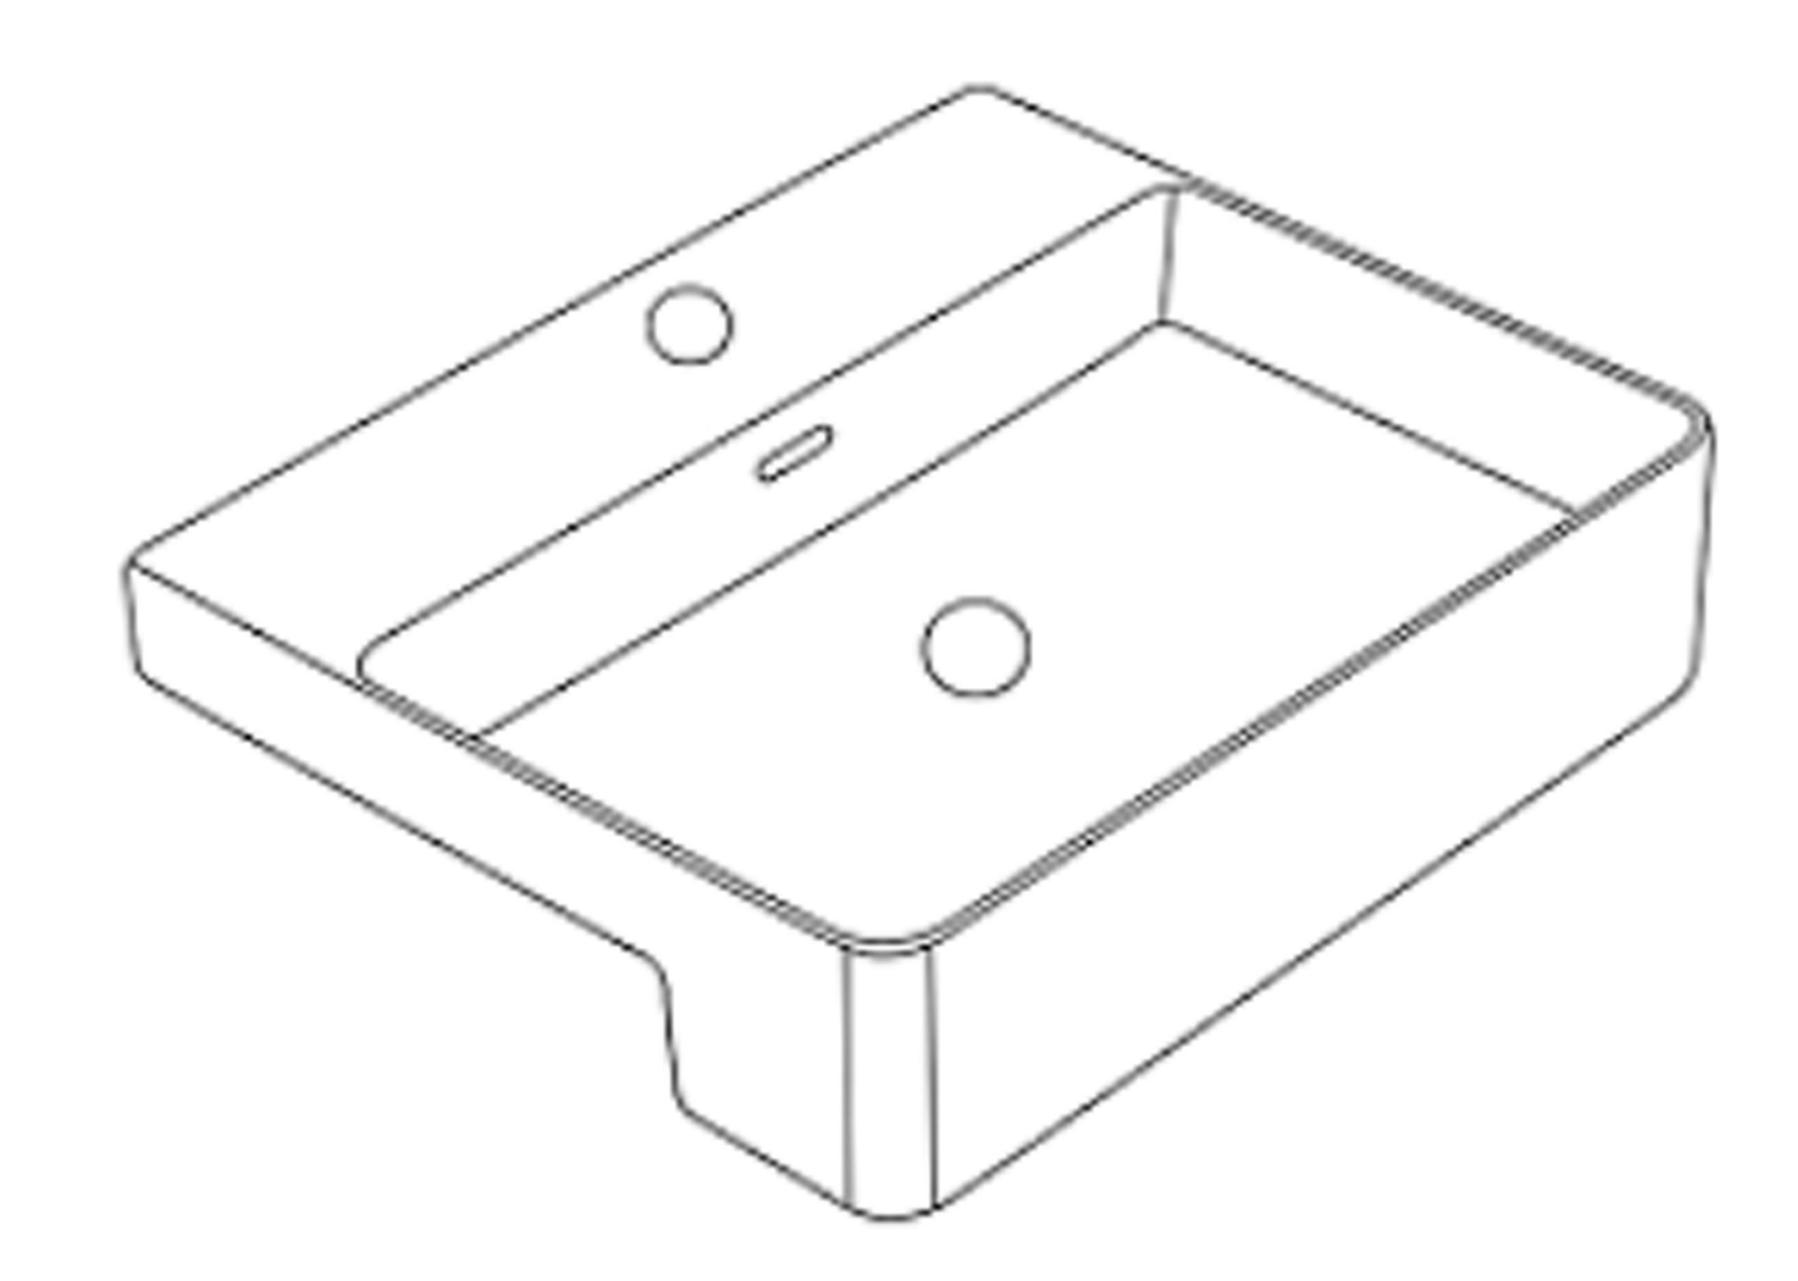

Please note: Image is for illustrative purposes only and may differ slightly to the actual product

- Single-person assembly
- Tools required
- We always recommend using professional tradespeople to install your product

# Congratulations on your purchase

And welcome to our growing gang of savvy shoppers

We're on a mission to bring you extraordinary bathroom products, for less. From modern to traditional style ceramics, plus the gorgeous fixtures, fittings and furniture to match. So, you can fall in love with your space every single day.

As one of the UK's largest independent bathroom stores, we've received countless awards; including the National Business Awards UK, the Digital Entrepreneur Awards and being placed on The Sunday Times Fast Track 100.

We hope your new product exceeds your highest expectations. However, if you experience any problems, please:

- log in to your account and contact our customer services team via your self-serve portal – <u>betterbathrooms.com/CustomerAccount/Login</u>
- contact us via betterbathrooms.com/content/contact-us

# Important information

- Please read these instructions thoroughly and retain for future reference
- Always check for pipes and cables before drilling

#### **Parts**


1 x Basin

# Tools required


Glue, drill and hole cutter

#### Installation


1. Please pre-drill the faucet hole to ensure a proper fit with the product's faucet hole.

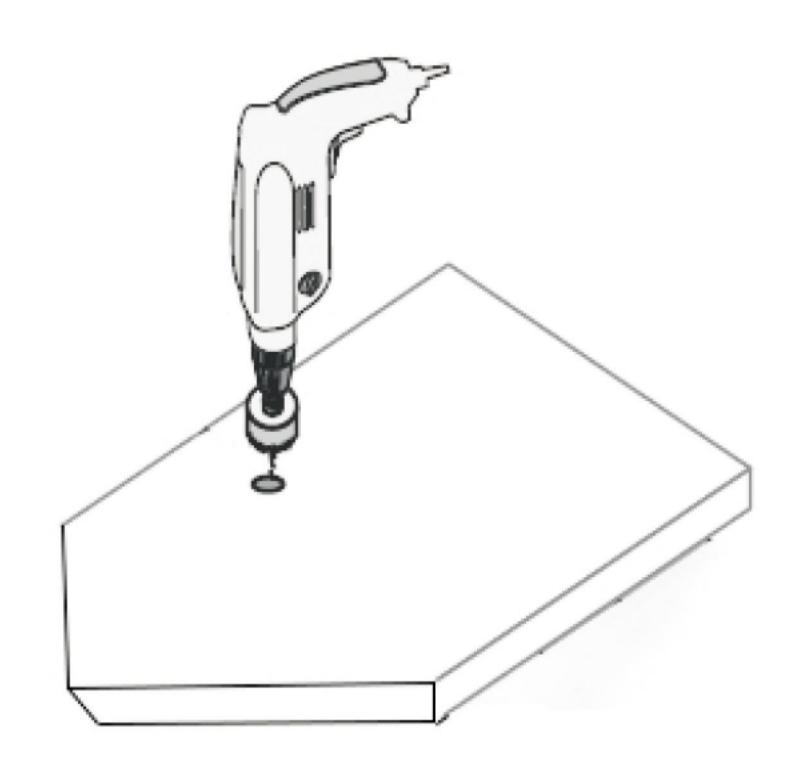


2. Carve according to the size of the ceramic insert. Seal the inside and exposed edge after cutting to prevent water or moisturepenetration.

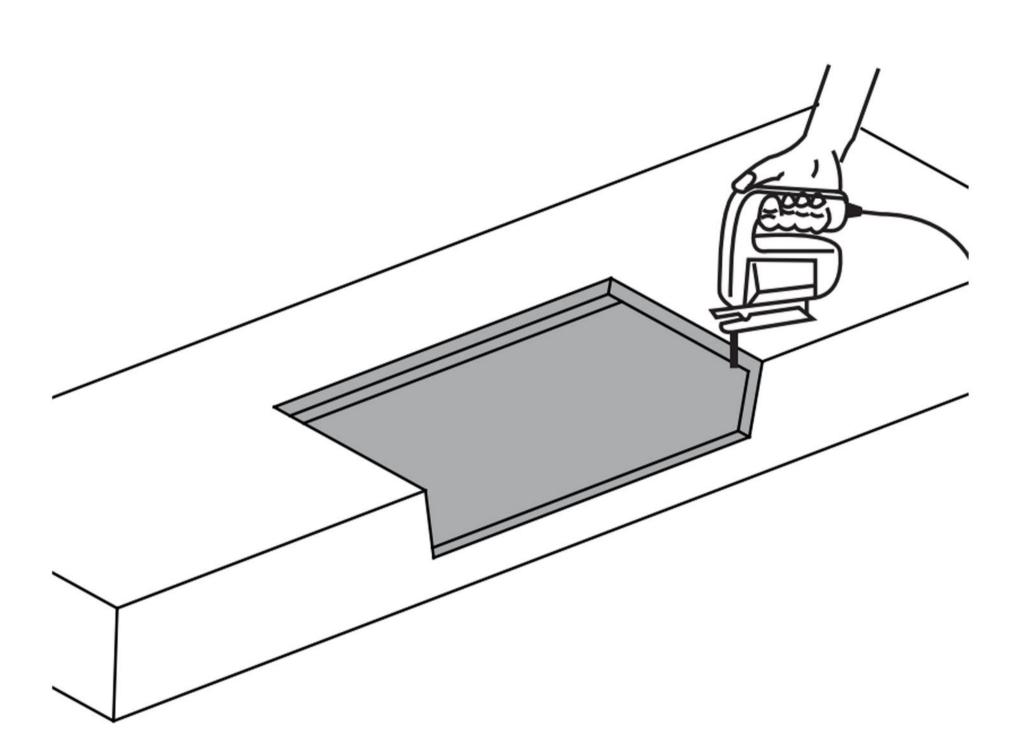


3. Try to place the product on the countertop and make sure it can be easily reached.

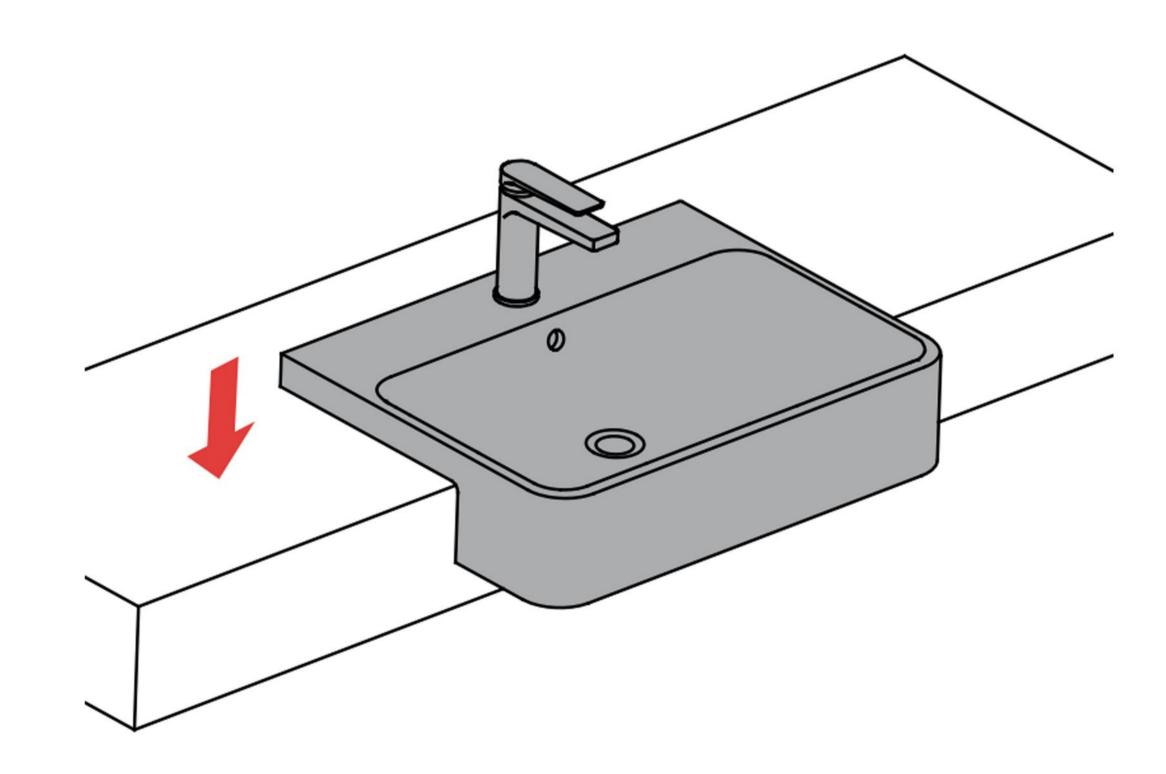


4. Fit the basin waste to the basin as shown (and follow waste instruction).

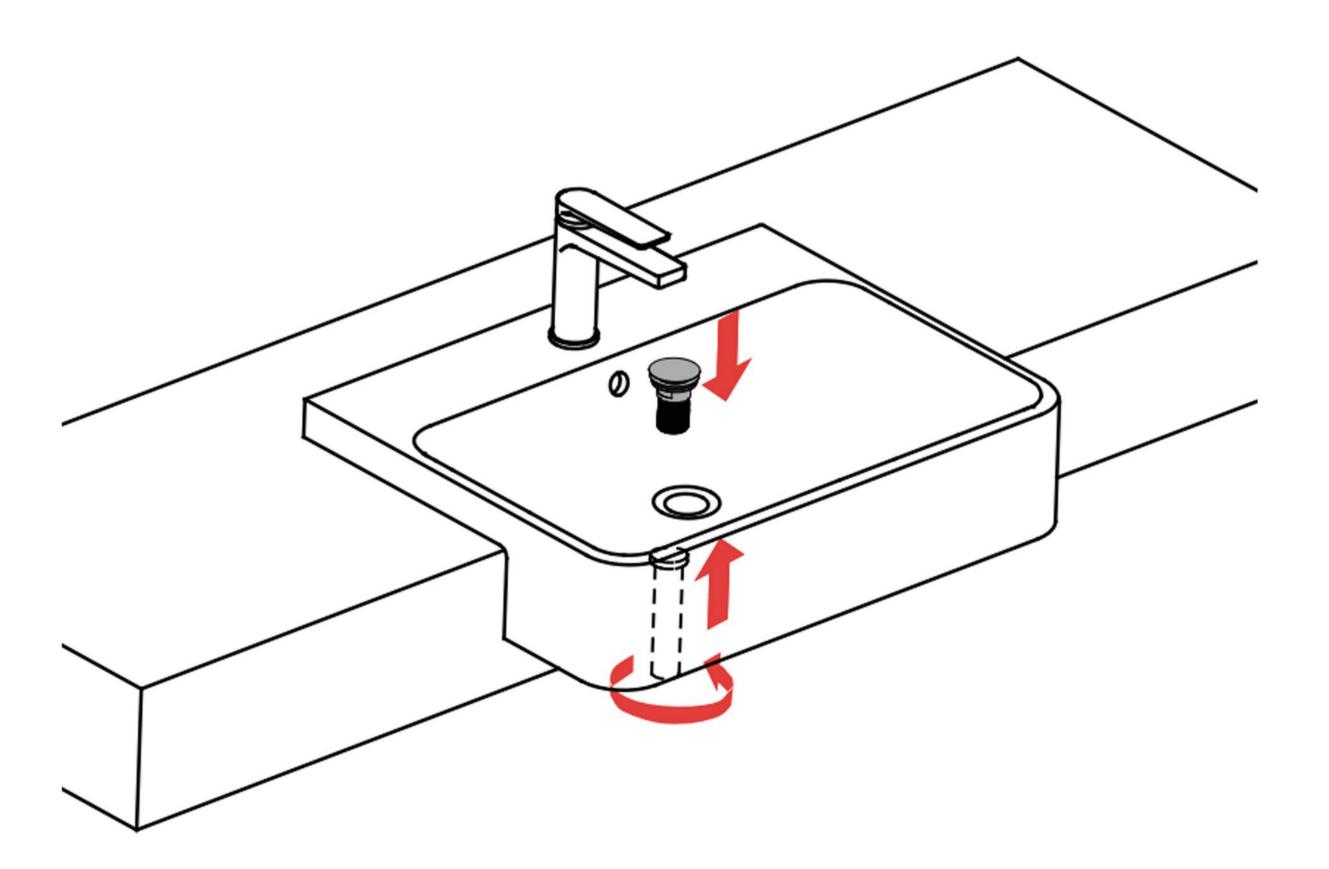

5. The water inlet has been properly installed.

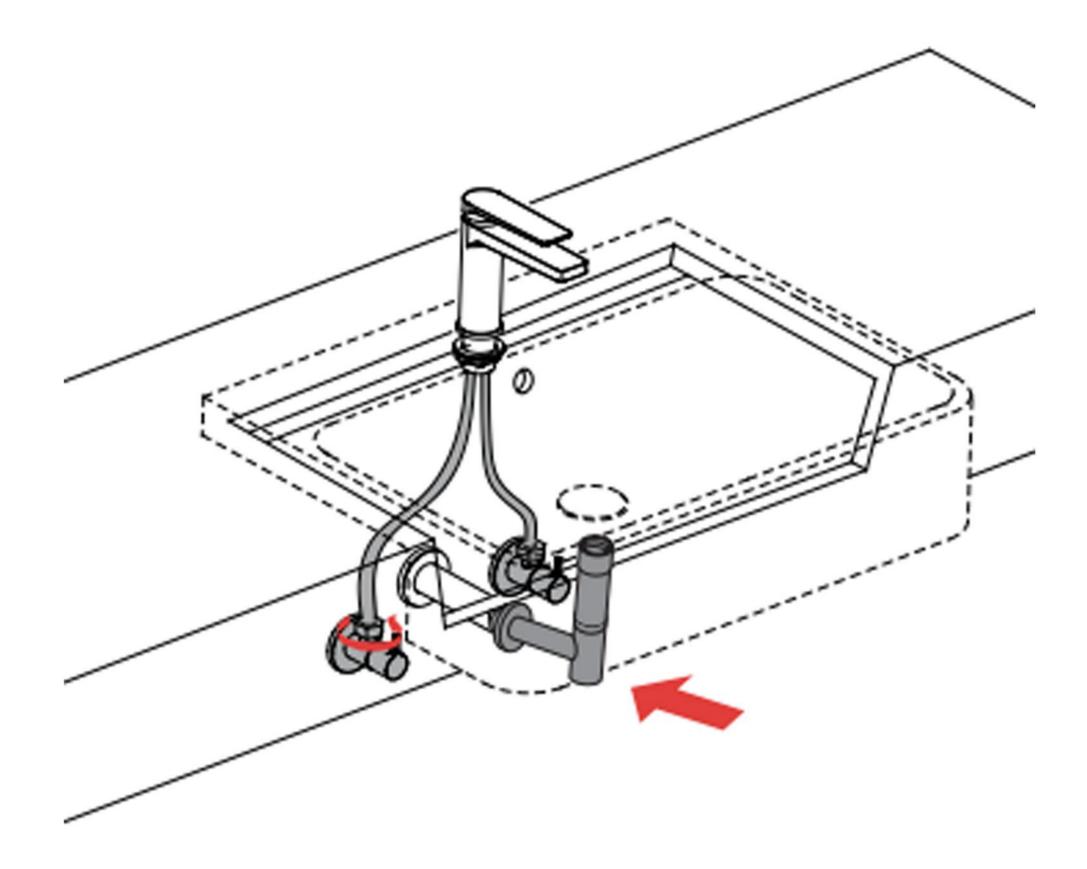

6. Place the sink in the correct position so that the faucet hole can align with the drilled hole. All the areas where the countertop and the ceramic meet should be sealed with glue for fixation. (No adhesive provided)

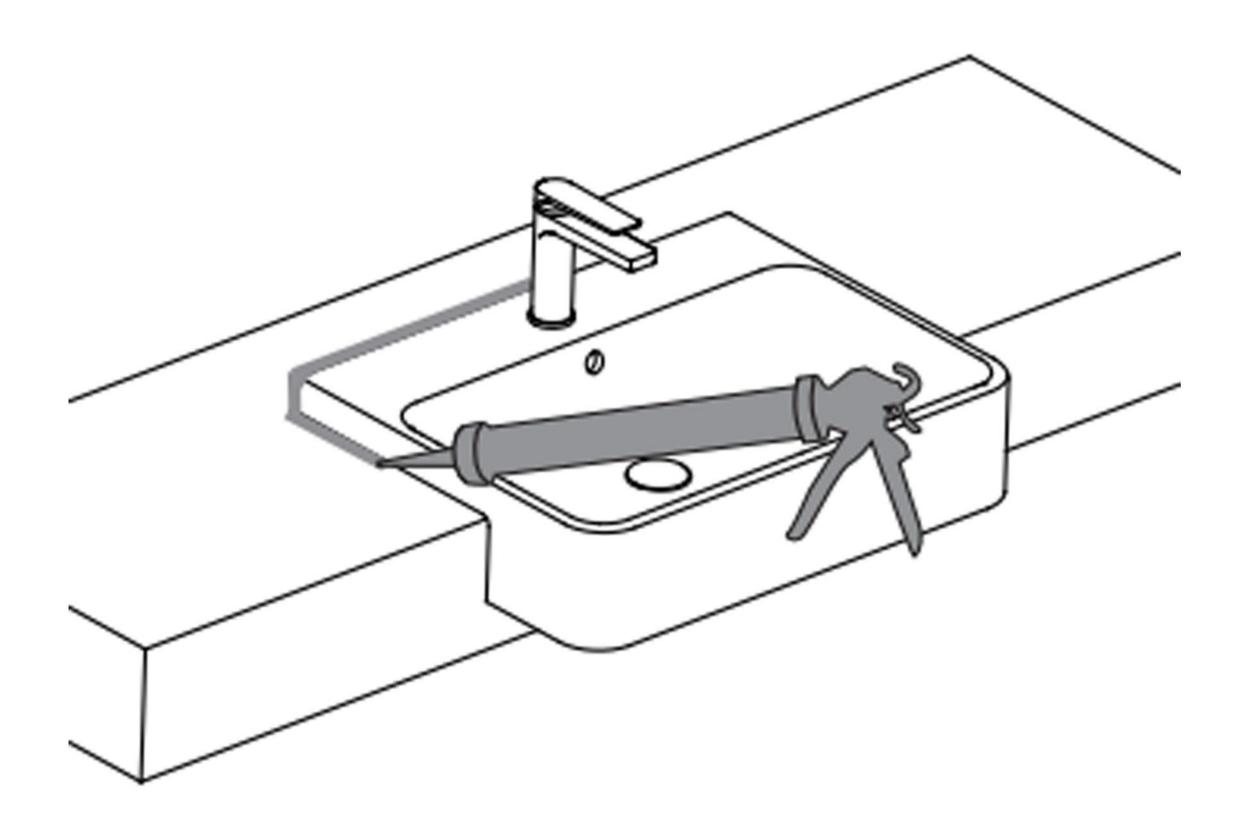

Please note: Allow all sealant to dry for at least 24 hours before use 724 5



# Cleaning

To maintain the surface finish of your product, wipe clean after every use, using a clean damp cloth, a mild detergent mixture can be used. Do not use abrasive cleaning agents or materials which can strip and scratch the surface; the use of these agents or materials can invalidate your guarantee.

#### For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

