


Installation instructions

1. Identify all components are present prior to installation.
2. Position the flange (NO. 3) and FOAM washer (NO. 4) on the basin hole.
3. Install the rubber washer (NO. 5) and waste body (NO. 6), tighten the screw (NO. 2), then screw the plug (NO. 1).
4. Check all joints and connections for leakage once the installation is complete.

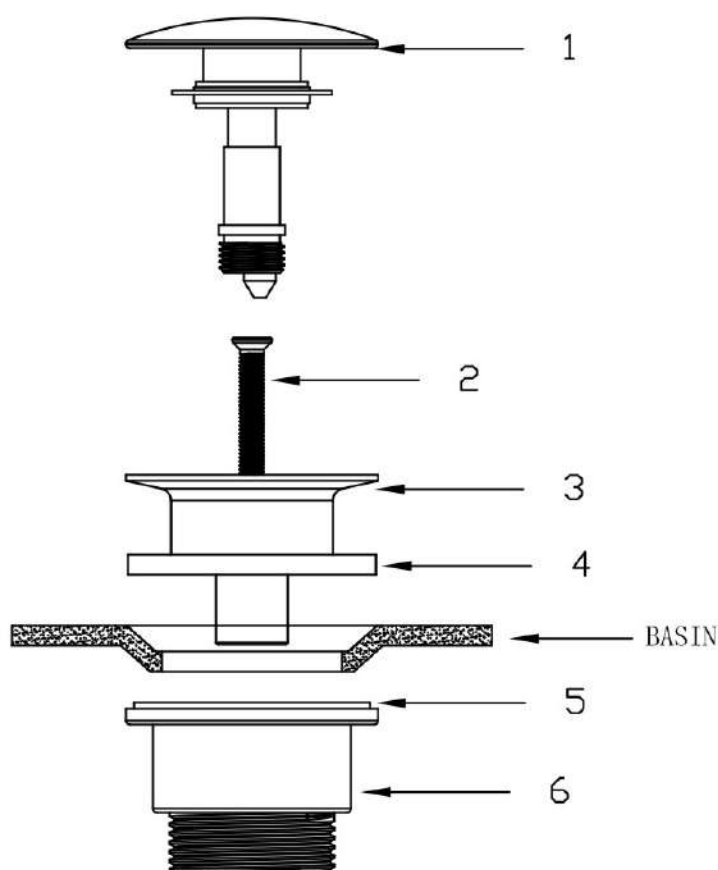

- 1. Plug x1
- 2. Screw x1
- 3. Flange x1
- 4. FOAM washer x1
- 5. Rubber washer x1
- 6. Waste body x1

Aftercare:

The end user is required to regularly maintain and clean product using warm soapy water and a soft cloth for the product warranty to be valid. Surfaces should be maintained using a clean damp cloth, NO corrosive and abrasive agents or materials should be used or come into contact with the surface finish, as this will invalidate your product warranty.