


USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

**better
bathrooms**

Single Door Chrome Mirrored Bathroom Cabinet with Battery Operated Lights 500x700mm - Capricorn

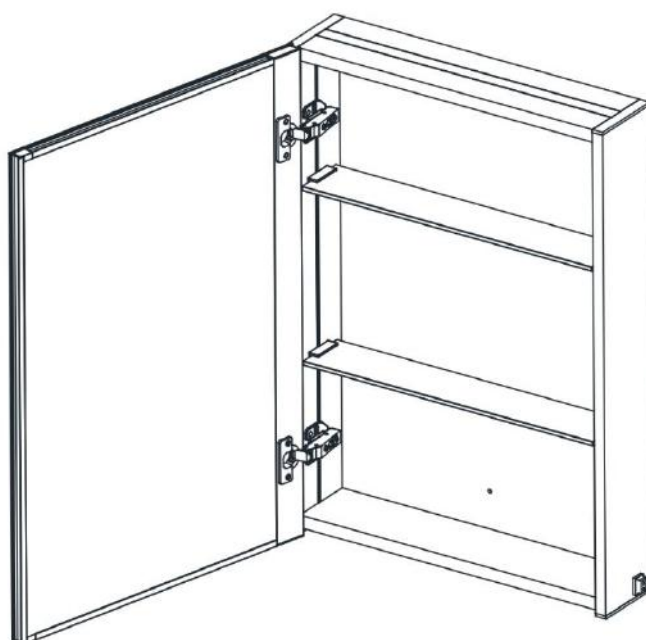

CAPB500

V20250729E

- LED LIGHTING
- BATTERY POWERED
- IP44 INGRESS PROTECTION

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you're after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/CustomerAccount/Login
- Contact us via betterbathrooms.com/contact/contact-us


CONTENTS

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
PRODUCT OVERVIEW	6
INSTALLING THE MIRROR	7
BATTERY INSTALLATION	7
DOOR ADJUSTMENT	8
SHELF ADJUSTMENT	8
OPERATION	8
TECHNICAL SPECIFICATIONS	9
DIMENSIONS	10

SAFETY

- This is for domestic, indoor use only.
- This product may contain delicate parts - be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause injury or malfunction. Never switch on a defective or damaged appliance. Remove the batteries before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Inspect the mirror to ensure there are no signs of damage prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.
- Once installed a bead of silicon can be applied between the mirror and the wall across the top and sides of the unit. Never seal the bottom of the mirror to the wall, as this may allow water to accumulate behind the mirror.
- Use only high-quality alkaline AA batteries.
- Do not mix old and new batteries.
- Do not mix different battery types or brands.
- Insert batteries with the correct polarity.
- Do not recharge non-rechargeable batteries.
- Do not disassemble or dispose of batteries in fire.
- Remove batteries if the product will not be used for a long time.
- Keep batteries out of reach of children.
- Do not short-circuit battery terminals.
- Dispose of used batteries according to local regulations.

BATHROOM ZONES

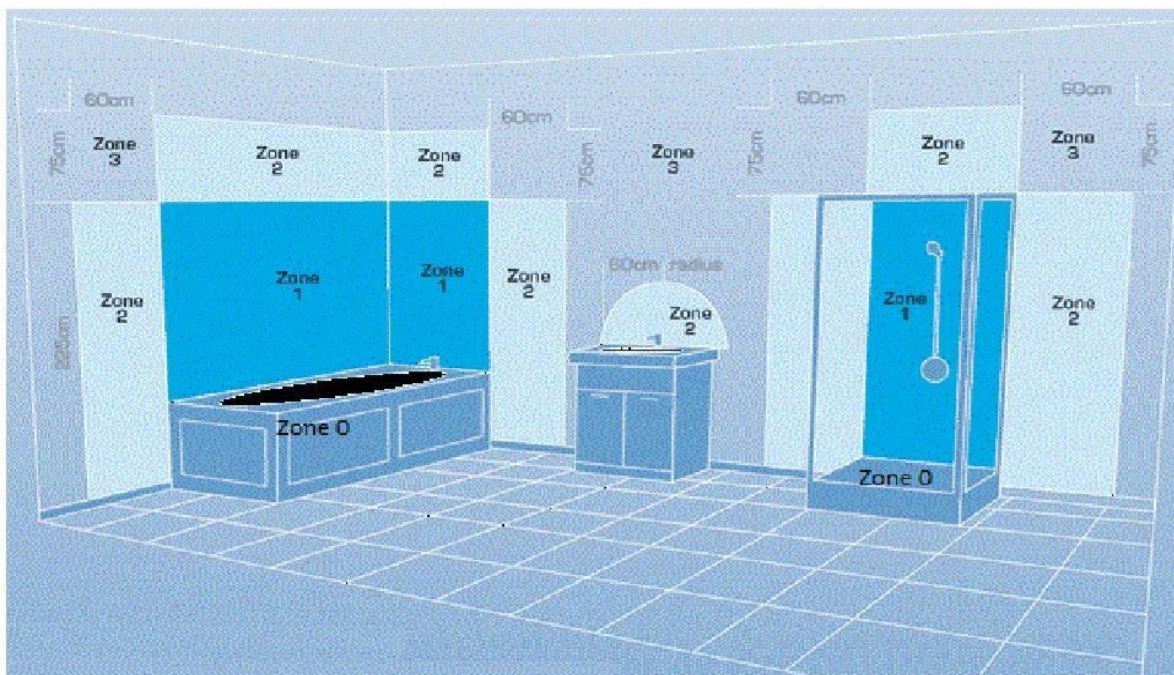


Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m

PARTS SUPPLIED


		
Wall Plug (x4)	Screw M5 (x4)	Hanging Bar (x1)

PLEASE NOTE: It is the installer's responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure, professional advice should be sought.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




FLAT HEAD
SCREWDRIVER



HAMMER




8mm DRILL BIT



PENCIL


PRODUCT OVERVIEW

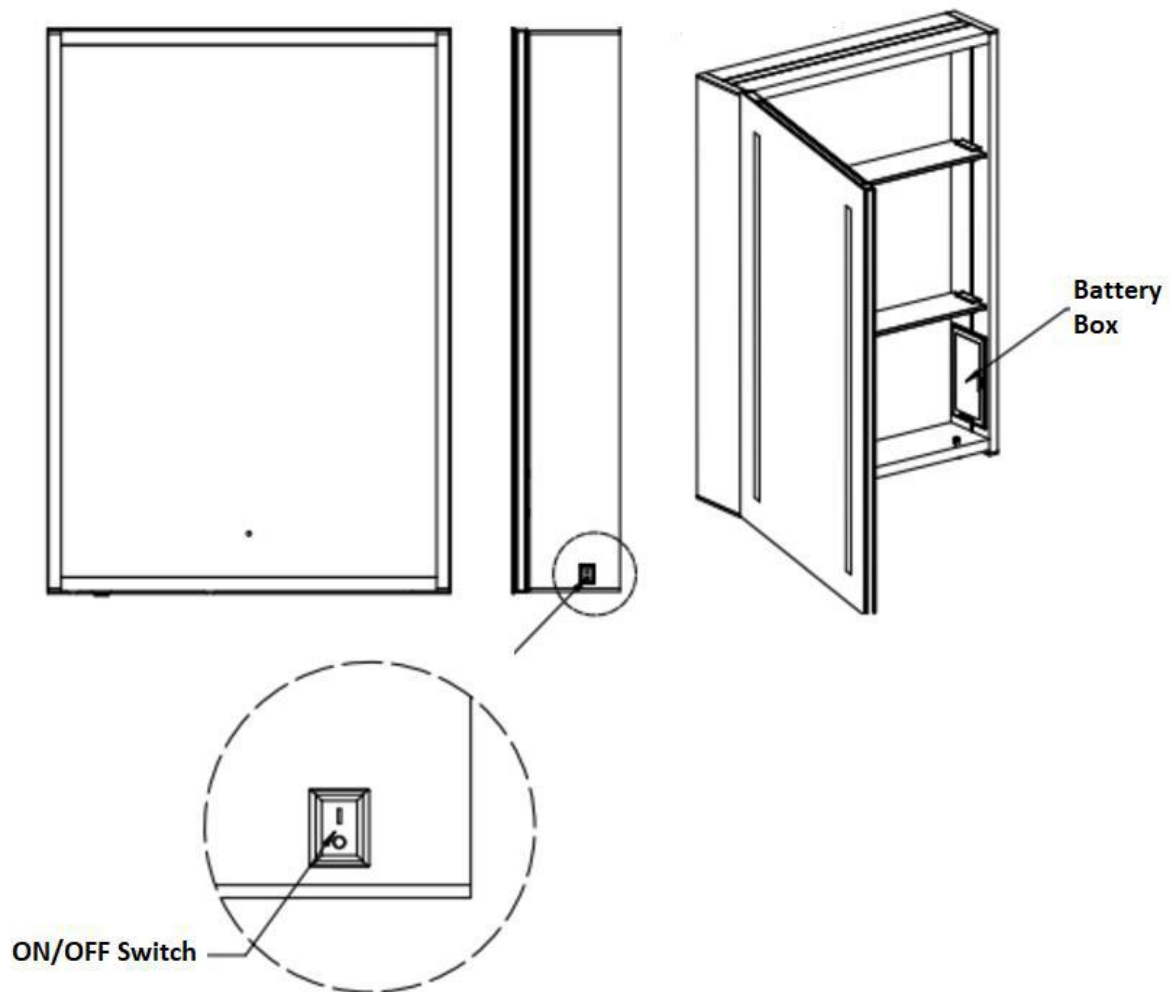

INSTALLATION


The cabinet is supplied with a hanging bar to mount the cabinet onto the wall. On the back of the cabinet, there is a corresponding bar designed to slot onto the hanging bar.

1. Choose the desired position of the cabinet, and from that determine the required position of the hanging bar.
2. Hold the hanging bar in position, using a spirit level to ensure it is level.
3. Use a pencil to mark the position of the three holes on the wall.
4. Move the hanging bar to one side and drill the holes using a suitable drill bit.
5. Insert wall plugs into the holes, ensuring they are flush with the wall.
6. Position the hanging bar back onto the wall, aligning the three holes with the wall plugs.
7. Secure the hanging bar to the wall using the supplied screws.




8. You can now hang the cabinet. Carefully lower the cabinet onto the hanging bar, ensuring it is secure and will not slide.
9. Open the cabinet door and use a pencil to mark the wall through the security hole on the back panel.
10. Remove the cabinet, drill a hole at the mark, then insert a wall plug into the hole.
11. Hang the cabinet back onto the hanging bar, ensuring that the security hole lines up with the wall plug.
12. Secure the cabinet to the wall using a screw through the security hole and into the wall plug previously installed.

BATTERY INSTALLATION(NOT SUPPLIED)

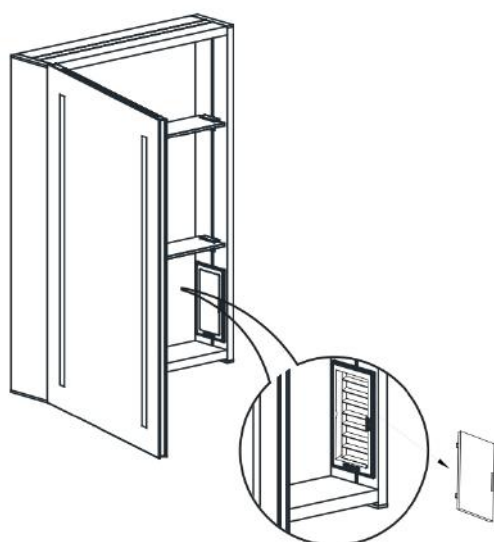


1. Open the cabinet door and remove the battery box cover from the side panel.

2. Insert 8 AA batteries(not included) into the battery box.

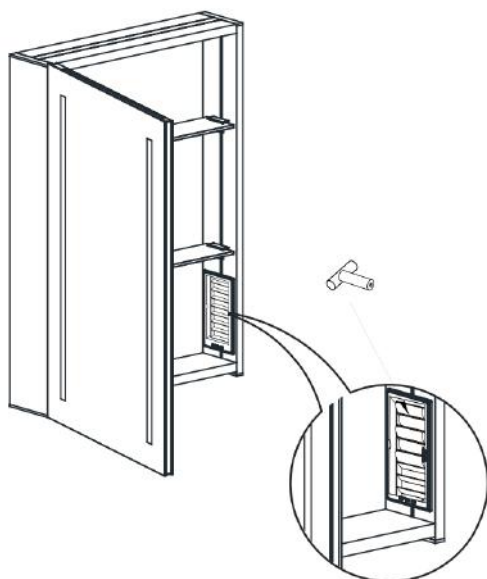


3. Refit the cover onto the battery box. There is a separate switch on the battery box, please turn on the switch.

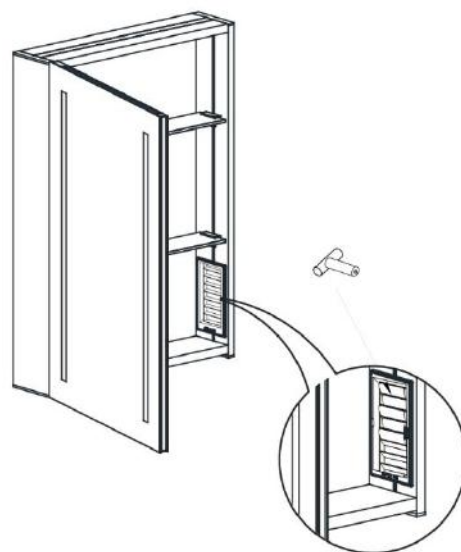

DOOR ADJUSTMENT


If the door is not level, it can be adjusted using the hinge screw. Turning the screw clockwise will move the door to the right, while turning it anticlockwise will pull the door to the left.

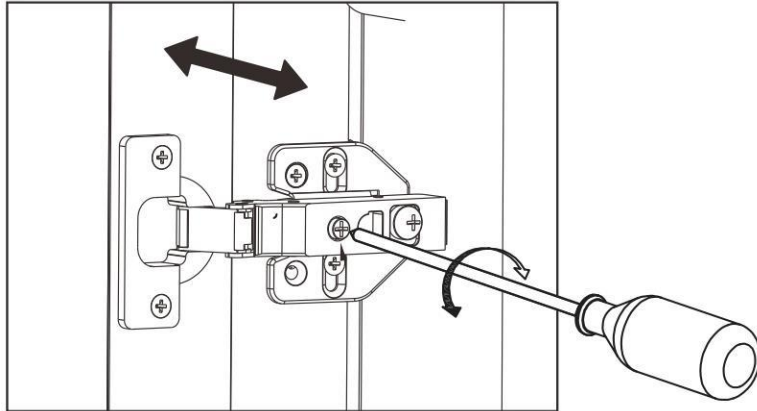

SHELF ADJUSTMENT

Loosen the snap screw on the shelf to adjust its position.


Once the shelf is in the correct position and level, retighten the screw to secure it in place.

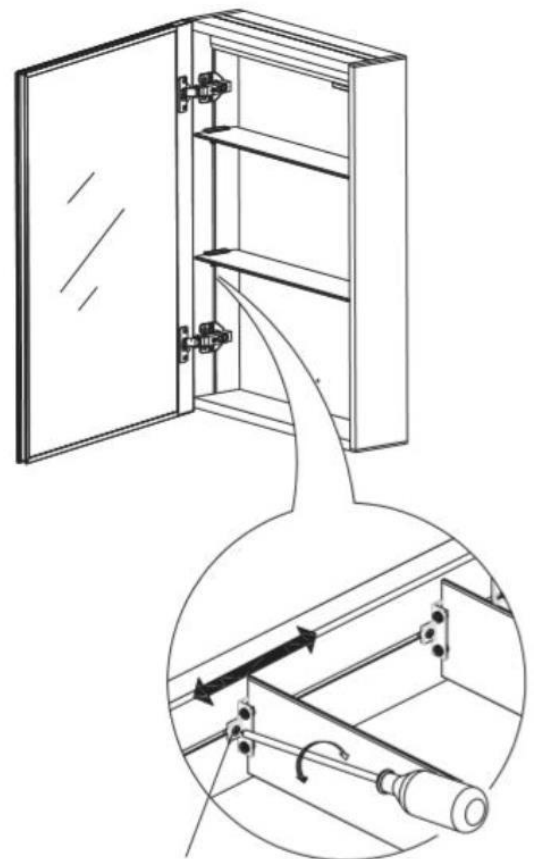

OPERATION

On the right-hand side of the cabinet, there is a round on/off switch.

Use this switch to turn the light on or off.



CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as this will have a detrimental effect on the appearance and lifespan of the product.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	CAPB500
WxHxD (mm)	500X700X135
Net Weight (Kg)	11.3
IP Rating	IP 44
Input	8xAA batteries (not included)

We recommend the use of high-capacity alkaline batteries. Using lower-capacity batteries may have a detrimental effect on the brightness and lifespan of the batteries.

DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.


Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.

DIMENSIONS

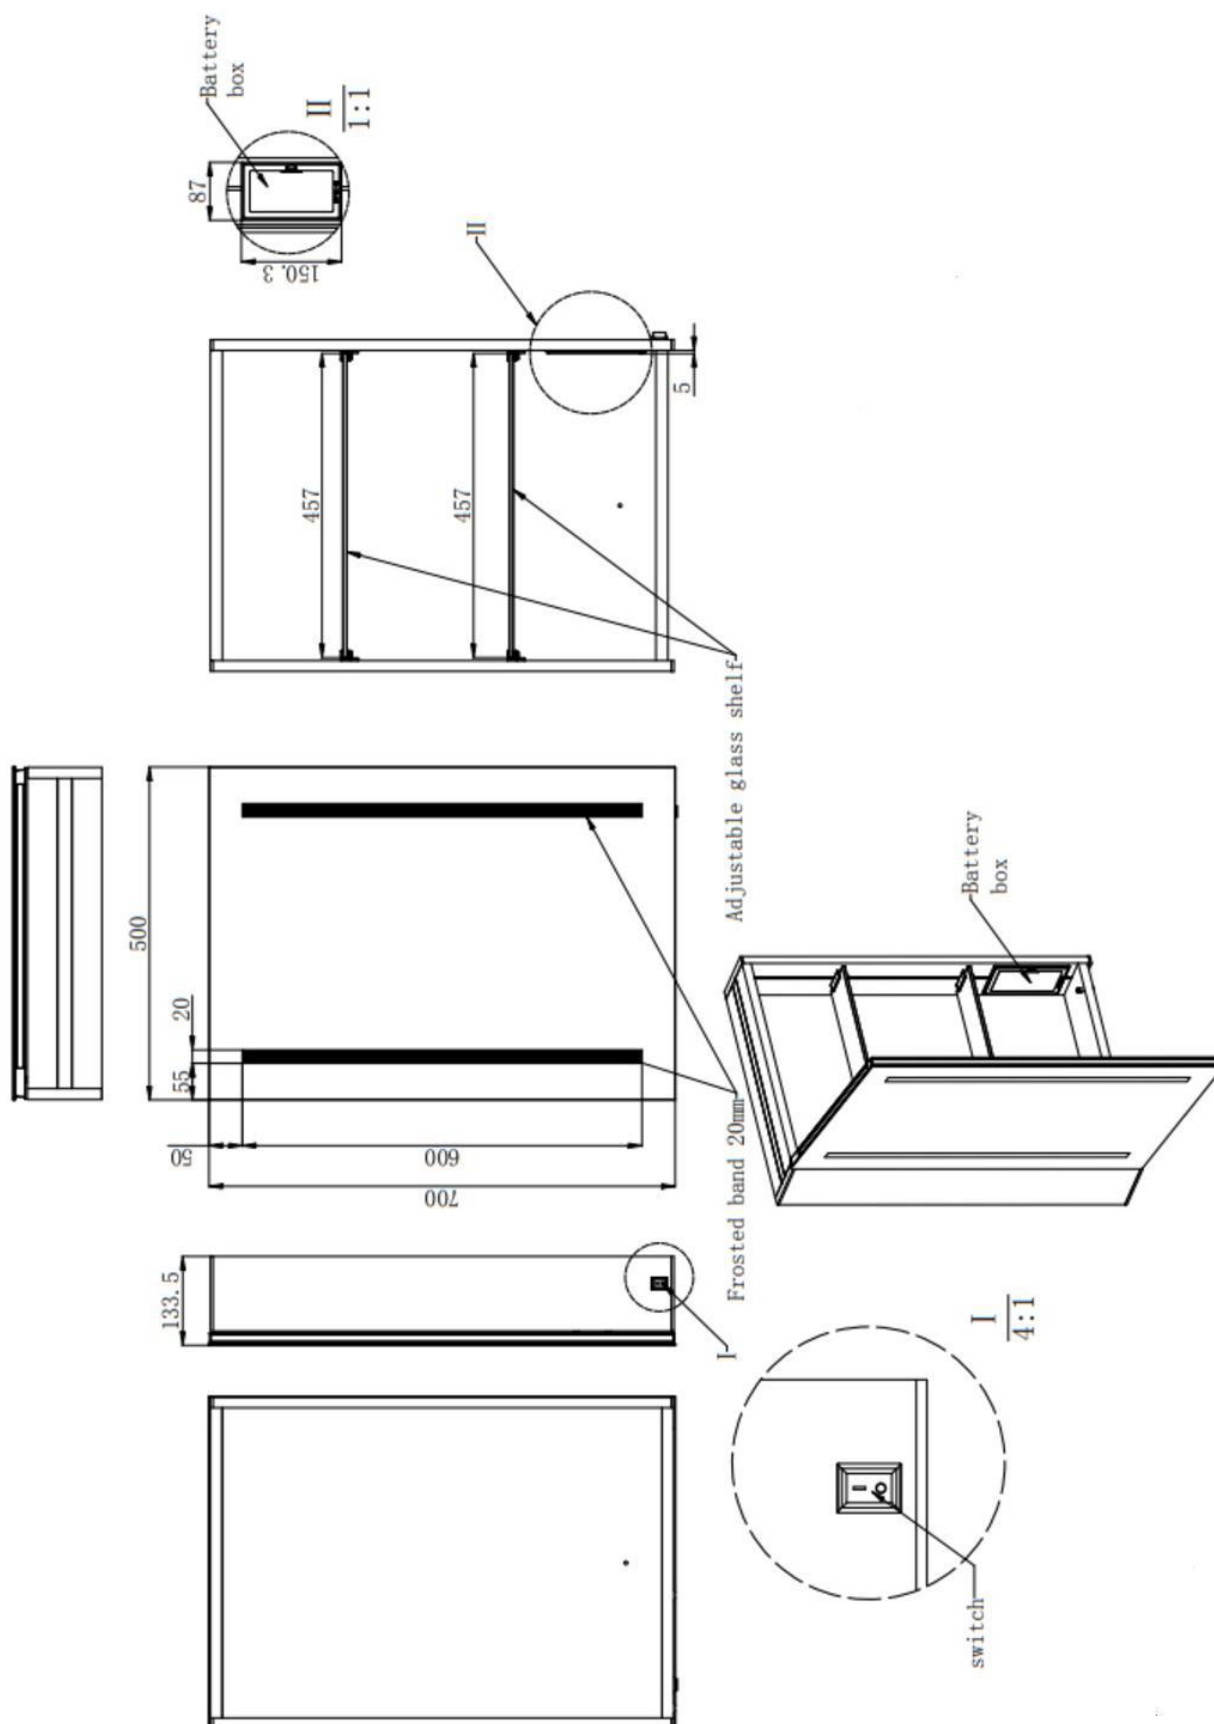

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group